

# REFRIGERATION Reach-Ins

## T Series Reach-Ins RATED #1 IN THE INDUSTRY

### FEATURES/BENEFITS

- 300 series stainless steel front (the finest stainless available)
- Interior - attractive, NSF approved, white aluminum and 300 series stainless floor
- Anodized quality aluminum ends, back and top
- Positive seal self-closing doors with lifetime guaranteed door hinges and torsion type closure system
- Extruded, aluminum door frames on glass doors
- Adjustable, heavy duty, PVC coated wire shelves
- Foamed-in-place polyurethane high density cell insulation (CFC Free)
- 4" diameter swivel castors standard (2½" diameter swivel castors standard for T-19, T-19G, T-19F & T-19FZ; leg levelers standard for T-12, T-12G, T-12F & T-12FG)
- Legs available for all models (not available on T-12, T-12G, T-12F & T-12FG)
- Door locks standard (not available on T-12, T-12G, T-12F & T-12FG)
- Exterior mounted temperature monitor (not available on T-12, T-12G, T-12F & T-12FG)
- Fluorescent interior lighting (glass doors models); patented integrated door light (IDL) standard on glass & combination door models (excludes T-12G & T-12FG)
- Incandescent interior lighting (solid door models)
- Energy efficient, "Low-E", thermal glass on glass door models
- Lifetime guaranteed recessed door handles standard on solid doors

### REFRIGERATION UNITS HAVE...

- Oversized and balanced, (134A), refrigeration system, factory sealed and pre-lubricated for long life - holds 33° to 38°F

### FREEZER UNITS HAVE...

- Oversized and balanced, environmentally friendly R404A, refrigeration system
- -10°F temperature (air off evaporator coil, -20°F) holds frozen food and ice cream (T-19FZ maintains 0°F)
- Large evaporator and coil heater permit short defrost cycle
- Automatic defrost system time initiated, temperature terminated
- Automatic evaporator fan motor delay during defrost cycle



T-72



T-49-2-G-2

T-35G

### T SERIES REFRIGERATORS

MODEL	DOORS	# OF SHELVES	HP	L X D† X H*
<b>SOLID DOORS</b>				
T-12	1	3	⅓	24⅞" x 23⅞" x 63⅞"
T-19	1	3	⅓	27" x 24½" x 75¼"
T-23	1	3	⅓	27" x 29½" x 78⅞"
T-35	2	6	⅓	39½" x 29½" x 78⅞"
T-49	2	6	½	54⅞" x 29½" x 78⅞"
T-72	3	9	½	78⅞" x 29½" x 79⅞"
T-49PT	2 fr / 2 bk	6	½	54⅞" x 32⅞" x 78⅞"
<b>FULL GLASS DOORS</b>				
T-12G	1	3	⅓	24⅞" x 23⅞" x 63⅞"
T-19G	1	3	⅓	27" x 24¾" x 75¼"
T-23G	1	3	⅓	27" x 29¾" x 78⅞"
T-35G	2	6	⅓	39½" x 29¾" x 78⅞"
T-49G	2	6	½	54⅞" x 29¾" x 78⅞"
T-72G	3	9	½	78⅞" x 29¾" x 79⅞"
<b>SOLID HALF DOORS</b>				
T-23-2	2	3	⅓	27" x 29½" x 78⅞"
T-49-4	4	6	½	54⅞" x 29½" x 78⅞"
T-49-4-PT	6	6	½	54⅞" x 32⅞" x 78⅞"
T-72-6	6	9	½	78⅞" x 29½" x 79⅞"
<b>GLASS HALF DOORS</b>				
T-23G-2	2	3	⅓	27" x 29¾" x 78⅞"
T-49G-4	4	6	½	54⅞" x 29¾" x 78⅞"
T-72G-6	6	9	½	78⅞" x 29¾" x 79⅞"
<b>COMBINATION HALF DOORS</b>				
T-23-1-G-1	1	3	⅓	27" x 29¾" x 78⅞"
T-49-2-G-2	2	6	½	54⅞" x 29¾" x 78⅞"
T-72-3-G-3	3	9	½	78⅞" x 29¾" x 79⅞"

\* Height does not include 5" for castor height or 6" for optional legs (31¼" castor height for T-19, T-19G)

† Depth does not include 138" for door handle (glass door models only)

T-12 available with optional 2½" diameter castors, legs not available

Leg levelers standard for T-12 and T-12G

Note: T-12 and T-12G height does not include 1" for door hinge

### T SERIES FREEZERS

MODEL	DOORS	# OF SHELVES	HP	L X D† X H*
<b>-10°F SOLID DOORS</b>				
T-12F	1	3	¼	24⅞" x 23⅞" x 63⅞"
T-19F	1	3	⅓	27" x 24½" x 75¼"
T-23F	1	3	⅓	27" x 29½" x 78⅞"
T-35F	2	6	¾	39½" x 29½" x 78⅞"
T-49F	2	6	¾	54⅞" x 29½" x 78⅞"
T-72F	3	9	1	78⅞" x 29½" x 79⅞"
<b>-10°F GLASS DOORS</b>				
T-12FG	1	3	⅓	24⅞" x 23⅞" x 62⅞"
T-23FG	1	3	¾	27" x 29¾" x 78⅞"
T-49FG‡	2	6	1½	54⅞" x 29¾" x 78⅞"
T-72FG‡	3	9	1½	78⅞" x 29¾" x 79⅞"
<b>-10°F SOLID HALF-DOORS</b>				
T-23F-2	2 S/S	3	½	27" x 29½" x 78⅞"
T-49F-4	4 S/S	6	¾	54⅞" x 29½" x 78⅞"
<b>0°F SOLID DOOR</b>				
T-19FZ	1	3	⅓	27" x 24½" x 75¼"

\* Height does not include 5" for castor height or 6" for optional legs (31¼" castor height for T-19F/FZ)

† Depth does not include 138" for door handles (glass door models only)

‡ Requires 115/208-230/60 Hz, single phase, 3 pole, 4 wire circuit

T-12F and T-12FG available with 2½" castors, legs not available

Leg levelers standard for T-12F and T-12FG

Note: T-12 and T-12FG height does not include 1" for door hinge

# Reach-Ins REFRIGERATION

## TSD & DT Series Reach-Ins

### FEATURES/BENEFITS

- Adjustable, heavy duty PVC coated wire shelves
- Incandescent interior lighting (solid doors)  
Fluorescent interior lighting on glass doors
- Foamed-in-place polyurethane high density cell insulation (CFC Free)
- Positive seal self-closing doors with lifetime guaranteed door hinges and torsion type closure system on swing door models
- Energy efficient, "Low-E", thermal glass on glass doors
- 4" diameter swivel castors standard equipment (DT Series). 6" legs standard equipment (TSD Series) Castors optional for TSD Series, 6" legs optional for DT Series
- Lifetime guaranteed recessed door handles standard on solid doors
- Self-contained system
- 300 series stainless steel front (the finest stainless available)
- Interior - attractive, NSF approved, white aluminum, coved corners and 300 series stainless steel floor
- Extruded, aluminum door frames on glass doors
- Anodized quality aluminum finished ends, back and top
- Dual, exterior mounted, digital temperature monitors
- Compartmentalized interior lighting (one for each door) Incandescent for solid doors, fluorescent for glass doors
- T-23DT features the refrigerator on top and the freezer on the bottom
- T-49DT features the refrigerator on the left and the freezer on the right

### SLIDE DOOR UNITS HAVE...

- Oversized and balanced, environmentally friendly (134A), refrigeration system, factory sealed and pre-lubricated for long life - holds 33° to 38°F
- Unique space saving slide door design for space tight kitchens - energy efficient
- .040 anodized quality aluminum ends and all stainless steel front and doors (solid door models)
- Interior - attractive, NSF approved, white aluminum and 300 series stainless floor
- Exterior mounted temperature monitor
- Bottom mount compressor

### DUAL TEMPERATURE UNITS HAVE...

- Oversized and balanced, refrigeration system, factory sealed and pre-lubricated for long life (134A refrigerator / R404A freezer)
- True's dual temperature models are equipped with two, self-contained, independent refrigeration systems (CFC free) in a bottom mount design
- Refrigerator holds 33° to 38°F; freezer holds -10°F



### SLIDE DOOR REFRIGERATORS TSD SERIES

MODEL	DOORS	# OF SHELVES	HP	L X D† X H*
<b>SOLID DOORS</b>				
TSD-33	2	6	1/2	39 1/2" x 29 1/2" x 78 3/4"
TSD-47	2	6	1/2	54 1/2" x 29 1/2" x 78 3/4"
TSD-69	3	9	1/2	78 1/2" x 29 1/2" x 79 1/2"
<b>GLASS DOORS</b>				
TSD-33G	2	6	1/2	39 1/2" x 29 1/2" x 78 3/4"
TSD-47G	2	6	1/2	54 1/2" x 29 1/2" x 78 3/4"
TSD-69G	3	9	1/2	78 1/2" x 29 1/2" x 79 1/2"

\* Height does not include 6 1/2" for leg height or 5" for optional castors

† Depth does not include 3/8" for door handle

### DUAL TEMPERATURE - DT SERIES

MODEL	DOORS	# OF SHELVES	HP REG - FRZR	L X D† X H*
<b>SOLID DOORS</b>				
T-23DT	2	3	1/2 1/2	27" x 29 1/2" x 78 3/4"
T-49DT	2	6	1/2 1/2	54 1/2" x 29 1/2" x 78 3/4"
<b>GLASS DOORS</b>				
T-23DT-G	2	3	1/2 1/2	27" x 29 1/2" x 78 3/4"
<b>SOLID HALF-DOORS</b>				
T-49DT-4	4	6	1/2 1/2	54 1/2" x 29 1/2" x 78 3/4"

\* Height does not include 5" for castor height or 6" for optional legs

† Depth does not include 3/8" for door handle (solid or glass door)

‡ Requires 115/208-230/60 Hz, single phase, 3 pole, 4 wire circuit



TSD-47



TSD-69



TSD-33G



T-23DT



T-49DT

# REFRIGERATION **Reach-Ins**

## TH Series Reach-Ins

### FEATURES / BENEFITS

- 300 series stainless steel doors and front, the finest stainless available (excludes glass door models)
- 040 anodized quality aluminum ends
- Extruded, aluminum door frames on glass doors
- Incandescent interior lighting
- Foamed-in-place polyurethane high density cell insulation (CFC Free)
- Positive seal self-closing doors with lifetime guaranteed door hinges and torsion type closure system
- Energy efficient, "Low-E", thermal glass on glass doors
- 4" diameter swivel castors standard equipment, 6" legs available
- Lifetime guaranteed recessed door handles standard on solid doors
- Self-contained system
- Door locks standard

### HEATED CABINET UNITS HAVE...

- Powerfully provides holding temperatures of 80° to 180°F throughout the cabinet for uniform, forced-air, heating
- Adjustable, heavy duty chrome plated shelves
- Heater - sheathed for corrosion resistance
- Exterior mounted, color coded, temperature monitor
- 12" x 20" pan standard for contents requiring high humidity
- Adjustable dial control is a standard feature for low humidity application (turn counterclockwise to ventilate)
- Bun tray rack (optional) - Solid door heated cabinet interior accommodates this option (glass door model does not accommodate this option)

**True**®



### HEATED CABINETS - TH SERIES

MODEL	DOORS	# OF SHELVES	WATTS	L X D† X H*
<b>SOLID DOOR</b>				
TH-23	1	3	850	27" x 29½" x 78¾"
<b>GLASS DOOR</b>				
TH-23G	1	3	850	27" x 29¾" x 78¾"

\* Height does not include 5" for castor height or 6" for optional legs

† Height does not include 1" for ventilator cap

† Depth does not include 138" for door handle (glass door model only)

## Spec Series



### FEATURES / BENEFITS

- LED interior lighting (STR & STA models only)
- Factory balanced refrigeration system maintains 33° to 38°F for refrigerators and -10°F for freezers
- Four (4) shelving kits available
- Positive seal self-closing door with 120° stay open feature
- Lifetime guaranteed external cam lift door hinge. Four (4) hinges per full door section standard
- Lifetime guaranteed bolt style door lock
- Lifetime guaranteed heavy duty chrome die cast zinc door handle
- Exterior digital display
- High efficiency fan motors

### SPEC SERIES VARIATIONS

#### STAR SERIES

Exterior - Stainless steel door, front & sides

Interior - Stainless steel side walls, back, floor, ceiling & door liner

Reach-In Shelving - (1) Interior kit option factory installed per full section

#### STA SERIES

Exterior - Stainless steel door, front & sides

Interior - Aluminum side walls & back. Stainless steel floor & ceiling

Reach-In Shelving - (3) Heavy duty, chrome plated wire shelves per section

#### STG SERIES

Exterior - Stainless steel door, front & aluminum sides

Interior - Aluminum side walls & back. Stainless steel floor & ceiling

Reach-In Shelving - (3) Heavy duty, PVC coated wire shelves per section

### MODEL

### DOORS

### CABINET DIMENSIONS L X D† X H\*

#### REACH-IN REFRIGERATOR

MODEL	DOORS	HP	CABINET DIMENSIONS L X D† X H*
ST( )1R-1S	1	⅓	27½" x 33¾" x 77¾"
ST( )2R-2S	2	⅓	52⅝" x 33¾" x 77¾"
ST( )1R-2HS	1	⅓	27½" x 33¾" x 77¾"
ST( )2R-4HS	2	⅓	52⅝" x 33¾" x 77¾"
ST( )1R-1G	1	⅓	27½" x 33¾" x 77¾"
ST( )2R-2G	2	⅓	52⅝" x 33¾" x 77¾"
ST( )1R-2HG	2	⅓	27½" x 33¾" x 77¾"
ST( )2R-4HG	4	⅓	52⅝" x 33¾" x 77¾"
ST( )1R-1HG/1HS	1 Glass/1 Solid	⅓	27½" x 33¾" x 77¾"
ST( )2R-2HG/2HS	2 Glass/2 Solid	⅓	52⅝" x 33¾" x 77¾"

#### REACH-IN FREEZER

MODEL	DOORS	HP	CABINET DIMENSIONS L X D† X H*
ST( )1F-1S	1	⅓	27½" x 33¾" x 77¾"
ST( )2F-2S	2	⅓	52⅝" x 33¾" x 77¾"
ST( )1F-2HS	1	⅓	27½" x 33¾" x 77¾"
ST( )2F-4HS	4	⅓	52⅝" x 33¾" x 77¾"

\* Height does not include 61/8" for castor height or 6" for optional legs

† Height does not include 14" for system mechanical components

† Depth does not include 11½" for door handle



# Reach-Ins REFRIGERATION

## 300 Series Stainless TS Series Reach-Ins

### FEATURES / BENEFITS

- True's "TS" series is the choice for the exclusive 300 series stainless steel commercial application. Designed with enduring quality that protects your long-term investment and oversized refrigeration that guarantees superior food preservation
- 300 series stainless steel interior and exterior front and sides, with matching aluminum back
- Energy efficient, "Low-E", thermal glass on glass door models
- Solar, digital thermometer standard for easy visibility
- Incandescent interior lighting on solid door models
- Fluorescent interior lighting; Integrated door light (IDL) standard on glass & combination door models
- Adjustable, heavy duty, PVC coated wire shelves
- Positive seal self-closing doors with factory tested (over 1,000,000 times) lifetime guaranteed door hinges and torsion type closure system
- Lifetime guaranteed recessed door handles on solid doors
- Extruded, aluminum door frames on glass doors
- Foamed-in-place polyurethane high density cell insulation (CFC Free)
- Door locks standard
- 4" diameter swivel castors standard equipment, 6" legs available
- Bottom mount compressor
- Self-contained system
- Remote units available

**True**®



TS-23F



TS-49F-4



TS-72

### REFRIGERATION UNITS HAVE...

- Oversized and balanced, environmentally friendly (134A), refrigeration system, factory sealed and pre-lubricated for long life - holds 33° to 38°F

### FULL DOOR UNITS HAVE...

- TS-23/-F, -49/-F, -72/-F available with alternative hinge orientations (no charge)

### HALF-DOOR UNITS HAVE...

- Alternative hinge orientations available (contact factory)

### FREEZER UNITS HAVE...

- Oversized and balanced refrigeration system, factory sealed and pre-lubricated for long life. Environmentally friendly (R404A), refrigerant.
- -10°F temperature (air off evaporator coil, -20°F) - holds frozen food and ice cream
- Standard backguard improves airflow
- Defrost system time-initiated, temperature-terminated
- Automatic evaporator fan motor delay during defrost cycle
- Minimum wattage heater in cabinet frame and door

### 300 SERIES STAINLESS STEEL REFRIGERATORS

MODEL	DOORS	# OF SHELVES	HP	L X D† X H*
<b>SOLID DOORS</b>				
TS-23	1 S/S	3	1/3	27" x 29½" x 78¾"
TS-35	2 S/S	6	1/3	39½" x 29½" x 78¾"
TS-49	2 S/S	6	1/2	54½" x 29½" x 78¾"
TS-72	3 S/S	9	1/2	78½" x 29½" x 79½"
<b>GLASS DOORS</b>				
TS-23G	1 gls	3	1/3	27" x 29¾" x 78¾"
TS-49G	2 gls	6	1/2	54½" x 29¾" x 78¾"
TS-72G	3 gls	9	1/2	78½" x 29¾" x 79½"
<b>SOLID HALF DOORS</b>				
TS-23-2	2 S/S	3	1/3	27" x 29½" x 78¾"
TS-49-4	4 S/S	6	1/2	54½" x 29½" x 78¾"
TS-72-6	6 S/S	9	1/2	78½" x 29½" x 79½"
<b>GLASS HALF DOORS</b>				
TS-23G-2	2 gls	3	1/3	27" x 29¾" x 78¾"
TS-49G-4	4 gls	6	1/2	54½" x 29¾" x 78¾"
TS-72G-6	6 gls	9	1/2	78½" x 29¾" x 79½"
<b>COMBINATION HALF DOORS</b>				
TS-23-1-G-11	gls-1 S/S	3	1/3	27" x 29¾" x 78¾"
TS-49-2-G-22	gls-2 s/s	6	1/2	54½" x 29¾" x 78¾"
TS-72-3-G-33	gls-3 s/s	9	1/2	78½" x 29¾" x 79½"

### 300 SERIES STAINLESS STEEL FREEZERS

<b>SOLID DOORS</b>				
TS-23F	1 S/S	3	1/3	27" x 29½" x 78¾"
TS-35F	2 S/S	6	3/4	39½" x 29½" x 78¾"
TS-49F	2 S/S	6	3/4	54½" x 29½" x 78¾"
TS-72F‡	3 S/S	9	1	78½" x 29½" x 79½"
<b>GLASS FULL DOORS</b>				
TS-23FG	1 gls	3	3/4	27" x 29¾" x 78¾"
TS-49FG‡	2 gls	6	1½	54½" x 29¾" x 78¾"
TS-72FG‡	3 gls	9	1	78½" x 29¾" x 79½"
<b>SOLID HALF DOORS</b>				
TS-23F-2	2 S/S	3	1/2	27" x 29½" x 78¾"
TS-49F-4	4 S/S	6	3/4	54½" x 29½" x 78¾"

\* Height does not include 5" for castor height or 6" for optional legs

† Depth does not include 13½" for door handle (glass door models only)

‡ Requires 115/208-230/60 Hz, single phase, 3 pole, 4 wire circuit

# REFRIGERATION Reach-Ins

## TR Series Reach-Ins

### FEATURES / BENEFITS

- Shelving - 1 interior kit option included per full section at no charge. 4 different interior kits available
- Pilasters and tray slides/shelving are factory installed at no charge
- Exterior - 300 series stainless steel front, sides, bottom and back (the finest stainless available)
- Interior - 300 series stainless steel walls, back, floor & door liner
- Foamed-in-place polyurethane high density cell insulation (CFC free)
- Lifetime guaranteed recessed door handles
- Energy efficient, "Low-E", thermal glass on glass door models
- Exterior mounted digital thermometer
- Positive seal self-closing doors with 120° stay open feature. Lifetime guaranteed door hinges
- Extruded, aluminum door frames on glass doors
- Incandescent interior lighting (solid door); Fluorescent interior lighting (glass door)
- Door locks standard
- 4" diameter swivel castors standard equipment, 6" legs available
- Top mounted unit positioned out of food zone to maximize storage capacity
- Self-contained system
- Remote and Curb mountable units available

### REFRIGERATION UNITS HAVE...

- Oversized and balanced, environmentally friendly (134A), refrigeration system, factory sealed and pre-lubricated for long life - holds 33° to 38°F
- Hot gas condensate for energy efficiency

### FREEZER UNITS HAVE...

- Environmentally friendly (R404A), refrigerant
- Freezer holds -10°F (air off evaporator coil, -20°F) for the best in food preservation.
- Defrost system time-initiated, temperature-terminated
- Automatic evaporator fan motor delay during defrost cycle
- Minimum wattage heater in cabinet frame and door
- Standard backguard improves airflow (excludes

Pass-Thru model)

- Pass-thru freezer designed to be rear-loaded from prep area and front accessed

### HEATED UNITS HAVE...

- Powerfully provides holding temperatures of 80° to 180°F throughout the cabinet for uniform, forced-air, heating
- Heater - stainless steel for corrosion resistance
- Humidity control - 12" x 20" pan standard
- Manual humidity control is a standard feature (turn counterclockwise to ventilate)
- Pass-thru heated cabinet designed to be rear-loaded from prep area and front accessed

### DUAL TEMPERATURE UNITS HAVE...

- Equipped with two, self-contained, independent refrigeration systems

(CFC free)

- Left side refrigerator holds 33° to 38°F
- Right side freezer holds -10°F
- Compartmentalized, incandescent, interior lighting (one for each door)
- Automatic defrost system
- Automatic evaporator fan motor delay during defrost cycle
- Dual exterior mounted temperature monitors

**True®**



TR1DT-2HS



TR2R-2HG/2HS

### REACH-IN REFRIGERATORS - TR SERIES

MODEL	DOORS	HP	L X D† X H*
<b>SOLID DOORS</b>			
TR1R-1S	1	1/3	29" x 34 5/8" x 78 1/4"
TR2R-2S	2	1/2	51 3/8" x 34 5/8" x 78 1/4"
TR3R-3S	3	1/2	76 1/2" x 34 5/8" x 78 1/4"
<b>GLASS DOORS</b>			
TR1R-1G	1	1/3	29" x 34 7/8" x 78 1/4"
TR2R-2G	2	1/2	51 3/8" x 34 7/8" x 78 1/4"
TR3R-3G	3	3/4	76 1/2" x 34 7/8" x 78 1/4"
<b>SOLID HALF DOORS</b>			
TR1R-2HS	2	1/3	29" x 34 5/8" x 78 1/4"
TR2R-4HS	4	1/2	51 3/8" x 34 5/8" x 78 1/4"
TR3R-6HS	6	1/2	76 1/2" x 34 5/8" x 78 1/4"
<b>GLASS HALF DOORS</b>			
TR1R-2HG	2	1/3	29" x 34 5/8" x 78 1/4"
TR2R-4HG	4	1/2	51 3/8" x 34 5/8" x 78 1/4"
<b>COMBINATION HALF DOORS</b>			
TR1R-1HG/1HS	2	1/3	29" x 34 7/8" x 78 1/4"
TR2R-2HG/2HS	4	1/2	51 3/8" x 34 5/8" x 78 1/4"

\* Height does not include 5" for castor height or 6" for optional legs and 1" for system mechanical components (not on TR1DT-2HS)

† Depth does not include 1 1/4" for door handle (glass door models only). Depth does not include 2 1/4" for upper rear condensate enclosure on DT models

‡ Requires 115/208-230/60 Hz, single phase, 3 pole, 4 wire circuit

‡‡ Requires 115/208-240/60 Hz, single phase, 3 pole, 4 wire circuit

### REACH-IN FREEZERS - TR SERIES

MODEL	DOORS	HP	L X D† X H*
<b>SOLID DOORS</b>			
TR1F-1S	1	1/2	29" x 34 5/8" x 78 1/4"
TR2F-2S	2	3/4	51 3/8" x 34 5/8" x 78 1/4"
TR3F-3S‡	3	1 1/2	76 1/2" x 34 5/8" x 78 1/4"
<b>GLASS DOORS</b>			
TR1F-1G	1	3/4	29" x 34 7/8" x 78 1/4"
TR2F-2G‡	2	1	51 3/8" x 34 7/8" x 78 1/4"
<b>HALF DOORS</b>			
TR1F-2HS	2	1/2	29" x 34 5/8" x 78 1/4"
TR2F-4HS	4	3/4	51 3/8" x 34 5/8" x 78 1/4"
TR3F-6HS‡	6	1 1/2	76 1/2" x 34 5/8" x 78 1/4"
<b>PASS-THRU SOLID DOORS</b>			
TR2FPT-2S-2S‡	4	1	51 3/8" x 37 1/4" x 78 1/4"

### REACH-IN HEATED CABINETS - TR SERIES

MODEL	DOORS	WATTS	L X D† X H*
<b>SOLID DOORS</b>			
TR1H-1S‡‡	1	2000	29" x 34 5/8" x 78 1/4"
TR2H-2S‡‡	2	4000	51 3/8" x 34 5/8" x 78 1/4"

### REACH-IN DUAL TEMPERATURE - TR SERIES

MODEL	DOORS	HP	L X D† X H*
<b>SOLID DOORS</b>			
TR1DT-2HS	2	1/3 - 1/2	29" x 34 5/8" x 78 1/4"
TR2DT-2S‡	2	1/3 - 1/2	51 3/8" x 34 5/8" x 78 1/4"

# Reach-Ins REFRIGERATION

## TA Series Reach-Ins

### FEATURES / BENEFITS

- Exterior - 300 series stainless steel front, sides, bottom and back
- Interior - attractive, NSF approved, white aluminum sides and back. 300 series stainless floor and door liner
- Shelving - 3 heavy duty, PVC coated wire shelves per section
- Foamed-in-place polyurethane high density cell insulation (CFC free)
- Lifetime guaranteed recessed door handles
- Exterior mounted digital electronic thermometer features manual defogger
- Positive seal self-closing doors with 90° stay open feature. Lifetime guaranteed door hinges
- Incandescent interior lighting (solid doors); Fluorescent interior lighting (glass door)

- Energy efficient, "Low-E", thermal glass on glass door models
- Door locks standard
- 4" diameter swivel castors standard equipment, 6" legs available
- Self-contained system

### REFRIGERATION UNITS HAVE...

- Oversized and balanced, environmentally friendly refrigeration system, factory sealed and pre-lubricated for long life - hold 33° to 38°F
- Hot gas condensate for energy efficiency

### FREEZER UNITS HAVE...

- Environmentally friendly (R404A), refrigerant
- Freezer holds -10°F (air off evaporator coil, -20°F) for the best in food preservation
- Automatic defrost system
- Pass-thru freezer designed to be rear-loaded from prep area and front accessed

### DUAL TEMPERATURE UNITS HAVE...

- True's dual temperature models are equipped with two, self-contained, independent refrigeration systems (CFC free)
- TA1DT-2HS has refrigerator on top and freezer on bottom, TA2DT-2S has refrigerator on left and freezer on right; refrigerator holds 33° to 38°F, freezer holds -10°F

- Compartmentalized, incandescent, interior lighting (one for each door)
- Automatic defrost system

- Dual exterior mounted temperature monitors

### HEATED UNITS HAVE...

- Powerfully provides holding temperatures of 80° to 180°F throughout the cabinet for uniform, forced-air, heating
- Heater - stainless steel for corrosion resistance
- Humidity control - 12" x 20" pan standard
- Manual humidity control is a standard feature (turn counterclockwise to ventilate)
- Pass-thru heated cabinet designed to be rear-loaded from prep area and front accessed

### REACH-IN REFRIGERATORS

MODEL	DOORS	HP	L X D† X H*
<b>SOLID DOORS</b>			
TA1R-1S	1	1/3	29" x 34 5/8" x 78 1/4"
TA2R-2S	2	1/2	51 1/8" x 34 5/8" x 78 1/4"
TA3R-3S	3	1/2	76 1/2" x 34 5/8" x 78 1/4"
<b>GLASS DOORS</b>			
TA1R-1G	1	1/3	29" x 34 7/8" x 78 1/4"
TA2R-2G	2	1/2	51 1/8" x 34 7/8" x 78 1/4"
TA3R-3G	3	3/4	76 1/2" x 34 7/8" x 78 1/4"
<b>SOLID HALF DOORS</b>			
TA1R-2HS	2	1/3	29" x 34 5/8" x 78 1/4"
TA2R-4HS	4	1/2	51 1/8" x 34 5/8" x 78 1/4"
TA3R-6HS	6	1/2	76 1/2" x 34 5/8" x 78 1/4"
<b>GLASS HALF DOORS</b>			
TA1R-2HG	2	1/3	29" x 34 5/8" x 78 1/4"
TA2R-4HG	4	1/2	51 1/8" x 34 5/8" x 78 1/4"
<b>COMBINATION HALF DOORS</b>			
TA1R-1HG/1HS	2	1/3	29" x 34 7/8" x 78 1/4"
TA2R-2HG/2HS	4	1/2	51 1/8" x 34 7/8" x 78 1/4"

### REACH-IN FREEZERS

<b>SOLID DOOR</b>			
TA1F-1S	1	1/2	29" x 34 5/8" x 78 1/4"
TA2F-2S	2	3/4	51 1/8" x 34 5/8" x 78 1/4"
TA3F-3S†	3	1 1/2	76 1/2" x 34 5/8" x 78 1/4"
<b>GLASS DOORS</b>			
TA1F-1G	1	3/4	29" x 34 7/8" x 78 1/4"
TA2F-2G†	2	1	51 1/8" x 34 7/8" x 78 1/4"
<b>HALF-DOOR SOLID DOORS</b>			
TA1F-2HS	2	1/2	29" x 34 5/8" x 78 1/4"
TA2F-4HS	4	3/4	51 1/8" x 34 5/8" x 78 1/4"
TA3F-6HS†	6	1 1/2	76 1/2" x 34 5/8" x 78 1/4"
<b>PASS-THRU SOLID DOORS</b>			
TA2FPT-2S-2S†	4	1	51 1/8" x 37 1/4" x 78 1/4"

### DEEP REACH-IN DUAL TEMPERATURE

MODEL	DOORS	HP	REG - FRZR	L X D† X H*
<b>SOLID DOOR</b>				
TA1DT-2HS	2	1/3 - 1/2		29" x 34 5/8" x 78 1/4"
TA2DT-2S†	2	1/3 - 1/2		51 1/8" x 34 5/8" x 78 1/4"

### REACH-IN HEATED CABINETS

MODEL	DOORS	WATTS	L X D† X H*
<b>SOLID DOORS</b>			
TA1H-1S††	1	2000	29" x 34 5/8" x 78 1/4"
TA2H-2S††	2	4000	51 1/8" x 34 5/8" x 78 1/4"

\* Height does not include 5" for castor height or 6" for optional legs and

1" for system mechanical components (not on TA1DT-2HS)

† Depth does not include 1 1/8" for door handle (glass door models only) and 2 1/2" for upper rear condensate enclosure on DT models

‡ Requires 115/208-230/60 Hz, single phase, 3 pole, 4 wire circuit

**True**®



TA2R-2HG/2HS



TA1F-2HS



# REFRIGERATION Deep Reach-Ins

## TG Series Deep Reach-Ins

### FEATURES / BENEFITS

- 300 series stainless steel front
- Anodized quality aluminum sides, back and bottom
- Shelving - 3 heavy duty, PVC wire shelves per section
- Refrigeration & freezer units interior have attractive, NSF approved, white aluminum sides and back, 300 series stainless floor and door liner
- Heated units have anodized aluminum interior
- Foamed-in-place polyurethane high density cell insulation (CFC free)
- Lifetime guaranteed recessed door handles on solid door models
- Energy efficient, "Low-E", thermal glass on glass door models
- Positive seal self-closing doors with 90° stay open feature. Lifetime guaranteed door hinges (excludes Heated Cabinets)
- Incandescent interior lighting (solid door); Fluorescent interior lighting (glass door)
- Door locks standard
- 4" diameter swivel castors standard equipment, 6" legs available
- Self-contained system

### REFRIGERATION UNITS HAVE...

- Oversized and balanced, environmentally friendly, refrigeration system, factory sealed and pre-lubricated for long life - hold 33° to 38°F
- Exterior mounted digital electronic thermometer features manual defogger
- Hot gas condensate for energy efficiency

### FREEZER UNITS HAVE...

- Environmentally friendly (R404A), refrigerant
- Freezer holds -10°F (air off evaporator coil, -20°F) for the best in food preservation
- Automatic defrost system time-initiated, temperature-terminated
- Exterior mounted digital electronic thermometer features manual defogger
- Automatic evaporator fan motor delay during defrost cycle

### HEATED UNITS HAVE...

- Powerfully provides holding temperatures of 80° to 180°F throughout the cabinet for uniform, forced air, heating
- Heater - stainless steel for corrosion resistance
- Humidity control - 12" x 20" pan standard
- Doors equipped with lifetime guaranteed self-closing hinges with 120° stay open feature standard

**True**®



TG1R-2HG

TG2DT-2S

### DUAL TEMPERATURE UNITS HAVE...

- True's dual temperature models are equipped with two, self-contained, independent refrigeration systems (CFC free)
- TG1DT-2HS has refrigerator on top and freezer on bottom, TG2DT-2S has refrigerator on left and freezer on right; refrigerator holds 33° to 38°F, freezer holds -10°F
- Compartmentalized, incandescent, interior lighting (one for each door)
- Automatic defrost system
- Automatic evaporator fan motor delay during defrost cycle
- Minimum wattage heater in cabinet frame and door
- Dual exterior mounted temperature monitors

### REACH-IN REFRIGERATORS - TG SERIES

MODEL	DOORS	HP	L X D† X H*
<b>SOLID DOORS</b>			
TG1R-1S	1	1/3	29" x 34 5/8" x 78 1/4"
TG2R-2S	2	1/2	51 3/8" x 34 5/8" x 78 1/4"
TG3R-3S	3	1/2	76 1/2" x 34 5/8" x 78 1/4"
<b>GLASS DOORS</b>			
TG1R-1G	1	1/3	29" x 34 7/8" x 78 1/4"
TG2R-2G	2	1/2	51 3/8" x 34 7/8" x 78 1/4"
TG3R-3G	3	3/4	76 1/2" x 34 7/8" x 78 1/4"
<b>SOLID HALF DOORS</b>			
TG1R-2HS	2	1/3	29" x 34 5/8" x 78 1/4"
TG2R-4HS	4	1/2	51 3/8" x 34 5/8" x 78 1/4"
TG3R-6HS	6	1/2	76 1/2" x 34 5/8" x 78 1/4"
<b>GLASS HALF DOORS</b>			
TG1R-2HG	2	1/3	29" x 34 5/8" x 78 1/4"
TG2R-4HG	4	1/2	51 3/8" x 34 5/8" x 78 1/4"
<b>COMBINATION HALF DOORS</b>			
TG1R-1HG/1HS	2	1/3	29" x 34 7/8" x 78 1/4"
TG2R-2HG/2HS	4	1/2	51 3/8" x 34 7/8" x 78 1/4"

### REACH-IN FREEZERS - TG SERIES

<b>SOLID DOORS</b>			
TG1F-1S	1	1/2	29" x 34 5/8" x 78 1/4"
TG2F-2S	2	3/4	51 3/8" x 34 5/8" x 78 1/4"
TG3F-3S†	3	1 1/2	76 1/2" x 34 5/8" x 78 1/4"
<b>GLASS DOORS</b>			
TG1F-1G	1	3/4	29" x 34 7/8" x 78 1/4"
TG2F-2G†	2	1	51 3/8" x 34 7/8" x 78 1/4"
<b>SOLID HALF DOORS</b>			
TG1F-2HS	2	1/2	29" x 34 5/8" x 78 1/4"
TG2F-4HS	4	3/4	51 3/8" x 34 5/8" x 78 1/4"
TG3F-6HS†	6	1 1/2	76 1/2" x 34 5/8" x 78 1/4"

### PASS-THRU SOLID DOORS

TG2FPT-2S-2S†	4	1	51 3/8" x 37 1/4" x 78 1/4"
---------------	---	---	-----------------------------

### REACH-IN HEATED CABINETS - TG SERIES

SOLID DOORS	DOORS	WATTS	
TG1H-1S†	1	2000	29" x 34 5/8" x 78 1/4"
TG2H-2S†	2	4000	51 3/8" x 34 5/8" x 78 1/4"

### REACH-IN DUAL TEMPERATURE - TG SERIES

		HP	
SOLID DOORS	DOORS	REG-FRZR	LXD††XH*
TG1DT-2HS	2	1/5 - 1/2	29" x 34 5/8" x 78 1/4"
TG2DT-2S†	2	1/3 - 1/2	51 3/8" x 34 5/8" x 78 1/4"

\* Height does not include 5" for castor height or 6" for optional legs and 1" for system mechanical components

† Depth does not include 1 3/8" for door handle (glass door models only)

†† Depth does not include 2 1/4" for upper rear condensate enclosure

‡ Requires 115/208-230/60 Hz, single phase, 3 pole, 4 wire circuit

# Reach-Ins, Prep Tables REFRIGERATION

## 6000XL Reach-Ins

Delfield's 6000XL Series has been revised and modernized to an entirely new standard of excellence. The new 6000XL boasts the same high standards of quality and efficiency, informed by a new breed of energy and cooling technologies. All designed exclusively for the foodservice industry.

### STANDARD FEATURES:

- Stainless steel doors and front shroud
- Aluminum sides
- Seamless, Delrite® ABS interior liner
- Top mounted refrigeration system
- High performance Delflow refrigeration, designed to maintain 36° to 40°F
- Ships with casters mounted from factory (two & three section only)
- Easy to adjust epoxy shelves (three per section)
- Easy to read digital thermometer
- 10' cord and plug attached
- Full height doors, field rehingable
- Environmentally friendly R404a refrigerant
- One year parts and labor, 5 year compressor warranty, limited lifetime liner warranty
- Accepts 18" x 26" sheet pans
- Self closing doors with stay open feature
- Ergonomically correct, easy grip door handles
- ENERGY STAR®



Ask your sales representative for information on available models.



## 18PTB Series Refrigerated Pizza Prep Tables

You need a production center that keeps your costs low, productivity high and delivers a quality product. Delfield's pizza prep tables meet those needs with an integrated production center that promotes efficiency and production quality. In addition to our standard features, we provide a wide offering of options that allow you to configure your pizza prep table to meet your specific needs.

### STANDARD FEATURES:

- Top, sides and ends are constructed of 18-gauge stainless steel
- Units are mechanically cooled with diestamped openings to accommodate 12" x 20" hotel pans or fractional pans
- Pans and adapter bars by others
- Pans are recessed 2" to provide proper cooling for NSF 7
- High density polyurethane foam throughout unit
- Dart style quick change gaskets
- Stainless steel removable hinged covers
- On/off switch and rail on/off is located behind the louver
- Front louver is hinged for access to condensing unit and allow adequate air flow back of the unit
- 8' long electrical cord
- Environmentally friendly HFC-404A refrigerant
- One year parts and 90 day labor standard warranty



## 4400 Series Refrigerated Prep Tables

Our 4400 series prep tables provide an integrated design solution to your salad, sandwich and other meal preparation needs. Designed to be easy to work from, they provide a compact area where storage and assembly areas are combined to create an efficient production system. Labor productivity is high. Operational costs are low. Food is kept at safe, consistent temperatures, keeping your meal quality high and your food waste costs low.



### STANDARD FEATURES:

- Patented air screen ensures product stays cold without drying it out
- 100% front breathing, which allows the unit to be pushed against a wall or built into a cabinet or an existing line up
- Durable, rugged stainless steel sides, top and front
- Features Delfield's exclusive ABS interior (on sides) and is backed by a limited lifetime warranty
- Delfield supplies 1/2 size pans and adapter bars for top opening
- Salad top refrigerators are standard with 10" wide, dishwasher safe polyethylene cutting board treated with antimicrobial agent
- Environmentally friendly R404A refrigerant
- High density foamed in place polyurethane keeps energy costs low
- Black recessed quick grip handle
- Standard on 2" casters for easy cleaning and installation
- 7' cord and plug supplied
- One epoxy coated wire shelf standard, installed per door section
- ACT solid state electronic control
- One year parts and 90 day labor standard warranty



# REFRIGERATION **Reach-Ins**



## High Quality G Series Reach-Ins

**REFRIGERATORS, FREEZERS, PASS-THRUS, HEATED, REMOTE, EXPORT 220V, & HINGED GLASS DOOR MODELS AVAILABLE**

- Corrosion-resistant anodized aluminum sides & interior
- Reliable, energy efficient and durable with large storage capacities
- High quality stainless steel exterior front & doors (solid door models only)
- Full or half length doors with cylinder locks
- Easy-to-use microprocessor control with LED temperature display
- Balanced refrigeration systems using either R-134a or R-404A refrigerant
- 21 1/8" wide clear door openings to accept 18" x 26" pans
- Three epoxy coated shelves per section, installed at the factory
- Sturdy, self-closing doors with a stay open feature
- Gasket protecting anodized aluminum door liner
- One-piece stainless steel lift-up louver assembly
- Easy-to-clean, snap-in, vinyl magnetic door gaskets
- Incandescent lights with concealed switch (solid door models only)
- Anti-condensate door perimeter heaters
- Automatic, non-electric condensate removal
- Set of four (4) 6" high casters
- Cord & plug attached



**Traulsen**

TRUSTED



## Microprocessor Controls

### CONTROL FEATURES

- 3-Digit LED display (both °F & °C)
- Water resistant housing
- High/low temperature, door open, clean condenser and power loss alarms
- Communications capable and NDP compliant
- Visual defrost notification/defrost lockouts

### VALUE-ADDED BENEFITS

- Precise temperature control equates to:
  - 1 - Maximized food shelf life
  - 2 - More energy efficient operation
- Greater reliability reduces lifetime service cost
- Communications ability: if ever needed it won't require expensive modification or replacement



## Spec Line Reach-Ins

**ONE, TWO & THREE SECTION REACH-INS, PASS-THRUS, ROLL-INS & ROLL-THRU CABINETS**

R & A Series refrigerators are distinguished by their exclusive INTELA-TRAUL® microprocessor for precise temperature control, their proprietary air-flow system and NAFEM Data Protocol compliant communication technology

- Balanced energy efficient system
- "Load Sure" guard prevents improper loading
- User-friendly/labor saving design features
- Accommodates 18" x 26" sheet pans
- A variety of sizes to choose from
- Self contained or remote
- Value added warranties
- Many solid door ENERGY STAR® qualified models available

R SERIES: Stainless Exterior/Interior

A SERIES: Stainless Exterior/Anodized Aluminum Interior



**Traulsen**

TRUSTED



# Prep Tables REFRIGERATION

## Undercounter Sandwich Tables

### NEWLY DESIGNED

- Accommodates 6" deep pans & meets NSF7 standards
- Full-length reversible nylon cutting board
- Two powder coated shelves per door provided, on new pilaster design with 1" centers
- Full-compliment of plastic 4"  $\frac{1}{2}$  size pans provided
- Self-closing doors with stay open feature at 105° and new simple door handle design
- Interior mounted thermometer
- 8' cord & plug attached
- 6" high adjustable legs (casters optional)



**Traulsen**

TRUSTED



## Full Size Pizza Prep Tables

- "All-Day" temperature performance to NSF7 test requirements
- No product freezing & never dries product out
- Safe to store product in the rail overnight, two convenient open rail cover positions
- No ice or water to clean up, saving you significant time & labor every single day
- Equipped with drain, so it is easy to clean
- Stainless steel construction inside & out
- INTELA-TRAUL® plug & play patented microprocessor
- Easy-to-clean front facing condenser
- Large stainless steel work surface
- Self-closing doors
- Accommodate up to 6" deep full, half and third size pans without adapter bars
- Adjustable caster channel facilitates easy installation
- Interior accommodates 18" x 26" pans





**TGM-48R**



## Glass Door Merchandisers w/Sliding Doors

- Excellent cooling performance - maintains a constant temperature throughout the unit even under heavy use
- Bottom-mounted compressor
- Double pane glass doors with thermal film
- Fully adjustable wire shelves with non-corrosive coating
- Fluorescent lights for interior display and advertising effect
- Refrigeration unit on slide out rail
- Adjustable leg for stable installation

**TGM-35R** (2) sliding doors, 35 cu ft, (8) shelves, 41½"l x 30"d x 78½"h

**TGM-48R** (2) sliding doors, 48 cu ft, (8) shelves, 56"l x 30"d x 78½"h

**TGM-69R** (3) sliding doors, 69 cu ft, (12) shelves, 78"l x 30.1"d x 79½"h



**TGM-50RS**

## Glass Door Refrigerated Merchandisers w/Swing Doors

- White color cabinet
- Double pane glass doors with thermal film
- Fully adjustable wire shelves with non-corrosive coating
- Fluorescent lights for interior display and advertising effect
- Bottom-mounted compressor
- Refrigeration unit on slide out rail
- Adjustable leg for stable installation

**TGM-50RS** (2) door, (8) shelves, 50 cu ft, 56"l x 32"d x 79"h

**TGM-72RS** (3) door, (12) shelves, 72 cu ft, 78"l x 32"d x 79"h

REFRIGERATOR MANUFACTURER  
**Turbo air**



## Super Deluxe Series Solid Door Refrigerators and Freezers

- Digital Temperature Control System
- High quality S/S exterior and interior
- Self-diagnostic system displays current status of the unit
- Self-contained bottom-mount compressor
- Refrigerator holds 33° to 38°F
- Freezer holds -10°F for the best in food preservation
- Self-closing and stay open door features
- Adjustable, durable stainless steel wire shelves for durability and cleanliness
- Bottom-mounted compressor
- 4" swivel casters and door locks standard

### REFRIGERATORS

**TSR-23SD** (1) swing door, (3) shelves, (1) rack, 23 cu ft, 27.0"l x 30.8"d x 77.9"h

**TSR-35SD** (2) swing doors, (6) shelves, (2) rack, 35 cu ft, 39.5"l x 30.8"d x 77.9"h

**TSR-49SD** (2) swing doors, (6) shelves, (2) rack, 49 cu ft, 54.4"l x 30.8"d x 77.9"h

**TSR-72SD** (3) swing doors, (9) shelves, (3) rack, 72 cu ft, 81.9"l x 30.8"d x 77.9"h

### FREEZERS

**TSF-23SD** (1) swing door, (3) shelves, (1) rack, 23 cu ft, 27.0"l x 30.8"d x 77.9"h

**TSF-35SD** (2) swing door, (6) shelves, (2) rack, 35 cu ft, 39.5"l x 30.8"d x 77.9"h

**TSF-49SD** (2) swing door, (6) shelves, (2) rack, 49 cu ft, 54.4"l x 30.8"d x 77.9"h

**TSF-72SD** (3) swing door, (9) shelves, (3) rack, 72 cu ft, 81.9"l x 30.8"d x 77.9"h



# Prep Tables REFRIGERATION

REFRIGERATOR MANUFACTURER  
**Turbo air**

## Super Deluxe Series Sandwich Salad Units

- Holds 33° to 39°F
- Recessed handles
- Self-contained system
- Cold air compartment
- 5" casters
- Durable stainless steel interior and exterior guarantees the utmost in cleanliness and long product life
- Excellent cooling system



**TST-28SD**



**TST-60SD**

**TST-28SD** (1) swing door, 6.5 cu ft, (1) shelf, (8) pan, (1) hood, 27.5"l x 30"d x 37½"h

**TST-36SD** (2) swing door, 10 cu ft, (2) shelves, (10) pan, (1) hood, 36.2"l x 30"d x 37½"h

**TST-48SD** (2) swing door, 12 cu ft, (2) shelves, (12) pan, (1) hood, 48.2"l x 30"d x 37½"h

**TST-60SD** (2) swing door, 16 cu ft, (2) shelves, (16) pan, (1) hoods, 60.2"l x 30"d x 37½"h

**TST-72SD** (3) swing door, 19 cu ft, (3) shelves, (18) pan, (2) hoods, 72.7"l x 30"d x 37½"h

REFRIGERATOR MANUFACTURER  
**Turbo air**

## Super Deluxe Series Undercounter Refrigerators

- Holds 33° to 38°F
- Excellent cooling system
- High density polyurethane insulation
- Self-contained system
- Durable stainless steel wire shelves
- Self-closing door and recessed handle
- 5" casters



**TUR-48SD**

**TUR-28SD** (1) swing door, 7 cu ft, (1) shelf, 27.5"l x 30"d x 31"h

**TUR-36SD** (2) swing doors, 11 cu ft, (2) shelves, 36.2"l x 30"d x 29.7"h

**TUR-48SD** (2) swing doors, 12 cu ft, (2) shelves, 48.2"l x 30"d x 31"h

**TUR-60SD** (2) swing doors, 16 cu ft (2) shelves, 60.2"l x 30"d x 31"h

**TUR-72SD** (3) swing doors, 19 cu ft, (3) shelves, 72.7"l x 30"d x 31"h

## Super Deluxe Series Undercounter Freezers

- Holds -5° to -10°F for the best in frozen food preservation
- Excellent cooling system
- All exterior stainless steel construction
- High density polyurethane insulation
- Incandescent interior lighting
- Adjustable stainless steel wire shelves
- Self-contained system
- Recessed handles
- 5" casters



**TUF-28SD**



**TUF-60SD**

**TUF-28SD** (1) swing door, 7 cu ft, (1) shelf, 27.8"l x 30"d x 31"h

**TUF-48SD** (2) swing door, 12 cu ft, (2) shelves, 48.2"l x 30"d x 31"h

**TUF-60SD** (2) swing door, 16 cu ft, (2) shelves, 60.2"l x 30"d x 31"h

## Horizon Series Bottom Mount Refrigerators and Freezers




**BEVERAGE-AIR**

LEADERS IN INNOVATION & RELIABILITY SINCE 1944

- Stainless steel interior and exterior
- Foamed-in-place CFC and HCFC-free polyurethane insulation
- Electronic control with digital display
- Cam-lift hinges with 120° self-closing doors with automatic hold-open feature
- Anti-microbial door handles • Door locks standard
- Solid doors • 3 shelves per section standard
- 6" heavy duty casters standard (3" casters or 6" legs optional)
- Environmentally friendly refrigeration system (R134a – refrigerators, R404A – freezers)
- 33¾" d x 78" h
- 115V • ENERGY STAR® qualified

MODELS		# OF	# OF		
REFRIGERATORS		DOORS	SHELVES	CU FT	HP
HBR23-1	27¼"w	1	3	23	⅓
HBR27-1	30"w	1	3	27	⅓
HBR49-1	52"w	2	6	49	⅓
HBR72-1	75"w	3	9	72	½
FREEZERS					
HBF23-1	27¼"w	1	3	23	½
HBF27-1	30"w	1	3	27	¾
HBF49-1	52"w	2	6	49	¾
HBF72-1	75"w	3	9	72	¾



**GLASS DOOR  
MODELS  
AVAILABLE**



HBR72-1

## Horizon Series Top Mounted Reach-Ins

- Heavy duty construction includes S/S front (doors and grilles), sides are gray finished steel, top, back, and bottom are galvanized steel
- Aluminum interior standard, S/S options available
- Electronic controlled thermostat
- Field-reversible doors
- Anti-microbial door handles
- Evaporator drainage – drain pan to condensate pan "fall" increased to 1½"
- Stepped shelving increases usable space
- 6" adjustable casters are standard
- 2" foamed-in-place CFC and HCFC-free polyurethane insulation
- 5 year compressor warranty
- 32" d x 78½" h
- 115V (HF3-1-S 208-230V)

**4 FINISH OPTIONS TO CHOOSE FROM.  
ASK YOUR SALES REPRESENTATIVE!**

REFRIGERATORS		# OF	# OF		
		DOORS	SHELVES	CU FT	HP
HR1-1-S	26"w	1	3	22	¼
HR2-1-S	52"w	2	6	46.8	⅓
HR3-1-S	78"w	3	9	68.2	¾
FREEZERS					
HF1-1-S	26"w	1	3	22	½
HF2-1-S	52"w	2	6	46.8	¾
HF3-1-S	78"w	3	9	68.2	1



HR1-1-S



HR2-1-S

## LumaVue Merchandisers

- Heavy duty construction includes white coated steel interior walls
- Exterior finish is heavy-duty steel with a baked on durable coating – choose black or white finish
- Whisper-quiet refrigeration system uses R134a refrigerant which is CFC and HCFC-free for compliance with environmental safety concerns
- Foamed-in-place CFC and HCFC polyurethane insulation
- One piece grille is easily removed for cleaning and servicing
- Double pane, lowE argon filled glass door(s) features inside and outside panes that are tempered for added safety
- White epoxy coated steel shelves are standard • Temperature range: 32° to 40°F
- 5 year compressor warranty • 2010 Federal Energy Compliant
- 115V • ENERGY STAR® qualified (excludes LV10, LV12)



**ASK ABOUT  
AVAILABLE  
OPTIONS.**



HINGED DOORS	L X D X H	# OF DOORS	# OF SHELVES	CU FT	HP
LV10	24" x 26" x 54"	1	3	10.0	⅓
LV12	24" x 24" x 62"	1	4	12.0	⅓
LV27	30" x 32" x 78"	1	5	27.0	⅓
LV49	52" x 32" x 78"	2	10	49.0	⅓
LV72	75" x 32" x 78"	3	15	72.0	½
SLIDING DOORS					
LV38	43½" x 32" x 78"	2	10	38.0	⅓
LV45	52" x 32" x 78"	2	10	47.0	⅓
LV66	75" x 32" x 78"	3	15	70.0	½

# Prep Tables REFRIGERATION

## Elite Series™ Standard Top Sandwich/Salad Prep Tables



SPE48-12

- Exterior has stainless steel finish on front, sides, top, door(s) and grille
- Removable hood and insulated lid assembly are made of stainless steel
- Cabinet back and bottom are constructed of galvanized steel
- New cartridge style hinges prevent door sag
- Pans are cooled from the bottom eliminating the necessity of air blanket
- Accommodates 6" deep pans, 4" deep polycarbonate pans included
- 10" deep cutting board, standard
- Locking divider bars secures pans into place to eliminate product spillage
- Heavy-duty pan liner prevents spills from falling into cabinet
- Airflow keeps products in open containers below 41°F and above freezing
- Self-closing doors with 120° stay open feature
- Snap-in magnetic gaskets for a positive seal and easy removal for cleaning
- CFC-free foamed-in-place polyurethane insulation
- Field reversible door
- 31"d x 41½"h
- 115V

ASK ABOUT AVAILABLE  
DRAWER OPTIONS.

		# OF DOORS	# OF SHELVES	CU FT	HP	STANDARD PANS 4" DEEP
<b>SPE27</b>	27"w	1	2	7.3	¼	6 - ½ size/2 - ½ size
<b>SPE48-08</b>	48"w	2	4	13.9	¼	8 - ½ size
<b>SPE60-08</b>	60"w	2	4	17.1	¼	8 - ½ size
<b>SPE72-08</b>	72"w	3	6	21.5	¼	8 - ½ size



Mega & Cutting Top  
Prep Tables also available.  
Ask your sales representative about other  
features and sizes available.

## DP Series Deli/Pizza Prep Tables



- Stainless steel exterior front and sides
- Anodized aluminum interior to prevent corrosion
- Self-closing doors on cartridge style hinges with 120° stay open feature
- Refrigerated pan opening provides even pan temperature
- Insulated lids to ensure constant temperature and reduced energy consumption
- Raised refrigerated pan rail accommodates 6" deep food service pans and provides even pan temperature plus prevents food spillage into cabinet interior
- Food service pans are not included
- 19" deep cutting board
- Adjustable epoxy coated steel wire shelves, standard (two per section)
- 3" casters, two with brakes standard
- Balanced refrigeration system to operate 36° to 38°F
- Refrigeration system utilizes ozone friendly R134a refrigerant
- 38¾"d x 43¾"h
- 115V

DP93



		# OF DOORS	# OF SHELVES	CU FT	HP	FULL SIZE PAN CAPACITY
<b>DP46</b>	46"w	1	2	16.7	¼	2
<b>DP67</b>	67"w	2	4	27.0	¼	3
<b>DP93</b>	93"w	3	6	39.8	¼	4
<b>DP119</b>	119"w	4	8	52.5	¼	5

ASK ABOUT AVAILABLE  
DRAWER OPTIONS.



BEVERAGE-AIR  
LEADERS IN INNOVATION & RELIABILITY SINCE 1944

## Undercounter & Worktop Refrigerators & Freezers

- Stainless steel exterior front, top, sides, door(s) and grille
- Anodized aluminum interior to prevent corrosion
- Self-closing doors on cartridge style hinges with 120° stay open feature
- Snap-in magnetic gaskets for a positive seal
- 2" CFC free foamed-in-place polyurethane insulation
- Balanced refrigeration system operates at 36° to 38°F
- Freezers operate at 0°F
- Adjustable epoxy coated steel wire shelves, standard (two per section)
- 6" casters, two with brakes standard
- Refrigerators utilize ozone friendly R134a refrigerant
- Freezers utilize ozone friendly R404A refrigerant
- Foodservice pans are not included with drawer units
- 29" base models (32" base models available)
- Consult factory for availability of optional glass doors, pullout drawers and/or tray slides
- Robust cartridge style hinges provides positive seal and eliminates door sagging issues (excludes glass door units and some special units)
- ENERGY STAR® qualified (UCR27A, UCR48A, WTR27A, WTR48A)
- 115V



UCR/UCF27A

WTR/WTF48A

ASK ABOUT AVAILABLE  
DRAWER OPTIONS.



BEVERAGE-AIR  
LEADERS IN INNOVATION & RELIABILITY SINCE 1944

34½" HEIGHT		# OF DOORS	# OF SHELVES	CU FT	HP	39½" HEIGHT		# OF DOORS	# OF SHELVES	CU FT	HP
<b>REFRIGERATORS</b>						<b>REFRIGERATORS</b>					
<b>UCR27A</b>	27"w x 30⅝"d	1	2	7.3	¼	<b>WTR27A</b>	27"w x 30⅝"d	1	2	7.3	¼
<b>UCR48A</b>	48"w x 29¼"d	2	4	13.9	¼	<b>WTR48A</b>	48"w x 30¼"d	2	4	13.9	¼
<b>FREEZERS</b>						<b>FREEZERS</b>					
<b>UCF27A</b>	27"w x 30⅝"d	1	2	7.3	¼	<b>WTF27A</b>	27"w x 29⅝"d	1	2	7.3	¼
<b>UCF48A</b>	48"w x 30¼"d	2	4	13.9	¼	<b>WTF48A</b>	48"w x 30¼"d	2	4	13.9	¼

ASK ABOUT OTHER AVAILABLE SIZES & OPTIONS.

ASK ABOUT OTHER AVAILABLE SIZES & OPTIONS.



# REFRIGERATION Prep Tables

## FEATURES / BENEFITS

- Oversized and balanced, environmentally friendly (134A), refrigeration system, with airflow directed at pans for colder temperatures. Guided airflow provides uniform temperature in a 360° circle throughout cabinet for stay-fresh meats and cheeses, and colder crisper salads
- Holds 33° to 41°F product temperature in pans
- All stainless steel front, top and sides
- Stainless steel patented foam insulated cover keeps pans colder to lock in freshness - minimizes condensation
- Interior - attractive, NSF approved, white aluminum sides and top, coved corners and 300 series stainless steel floor
- 5" diameter castors standard (legs available)
- Doors swing within cabinet dimensions
- Recessed handles
- Adjustable, heavy duty, PVC coated wire shelves (not available in drawered models)
- Foamed-in-place Ecomate

## SANDWICH/SALAD UNITS HAVE...

- Extra deep 11 3/4" full length removable cutting board
- Standard full set (1/2 size) 6 7/8" x 6 1/4" w x 4" d clear polycarbonate insert pans included (positioned in countertop). Also accommodates 6" and 8" deep pans (drawered models will not accommodate 8" deep condiment pans)

## MEGA TOP SANDWICH/SALAD UNITS HAVE...

- 8 7/8" wide full length removable cutting board
- Standard (1/2 size) 6 7/8" x 6 1/4" w x 4" d NSF approved clear polycarbonate insert pans included. Also accommodates 6" and 8" deep pans (except M-C model). (TSSU-27-12M-B standard with nine 1/2 and three 1/3 size pans; TSSU-27-12M-C standard with twelve 1/2 size pans); positioned in countertop
- Back hood and lid are removable for cleaning

## DUAL SIDED UNITS HAVE...

- Food prep access from both sides for high volume access along with the space efficiency of an island prep table

- Standard with 11 3/4" white polyethylene cutting board

## DRAWERED UNITS HAVE...

- Space to accommodate one 12" x 20" w x 6" d pan per drawer (drawer pans are not included). (48" models accommodate one 12" x 18" w x 6" d food storage box or one 1/2 size and one 1/3 size pan per drawer; not included)

## PIZZA PREP UNITS HAVE...

- Extra-deep 19 1/2" full length removable white polyethylene cutting board
- Standard full set of (1/2 size) 12 3/4" x 6 1/4" w x 6" d NSF approved clear polycarbonate food storage pans included in condiment rail
- Work surface 36" high
- Drawered models (drawered section only) will accommodate up to two 8" deep full size pans (12" x 20" w x 8" d) per drawer. Pans not included
- Garnish rack and service shelf optional. (Service shelf is not available on TPP-119 & TPP-119D-8)

**True®**

TSSU-27-12M-B



TPP-67D-2

## SANDWICH / SALAD UNITS

MODEL	DOORS/ DRAWERS	# OF SHELVES	# OF PANS	HP	L** X D† X H*
TSSU-27-8	1/0	2	8	1/3	27 7/8" x 30 1/8" x 36 3/4"
TSSU-36-8	2/0	4	8	1/3	36 3/8" x 30 1/8" x 36 3/4"
TSSU-48-8	2/0	4	8	1/3	48 3/8" x 30 1/8" x 36 3/4"
TSSU-48-10	2/0	4	10	1/3	48 3/8" x 30 1/8" x 36 3/4"
TSSU-48-12	2/0	4	12	1/3	48 3/8" x 30 1/8" x 36 3/4"
TSSU-60-8	2/0	4	8	1/3	60 3/8" x 30 1/8" x 36 3/4"
TSSU-60-10	2/0	4	10	1/3	60 3/8" x 30 1/8" x 36 3/4"
TSSU-60-12	2/0	4	12	1/3	60 3/8" x 30 1/8" x 36 3/4"
TSSU-60-16	2/0	4	16	1/3	60 3/8" x 30 1/8" x 36 3/4"
TSSU-72-18	3/0	6	18	1/2	72 3/8" x 30 1/8" x 36 3/4"
<b>DUAL SIDED MODEL</b>					
TSSU-60-16-DS-ST	2/0	4	16	1/3	60 3/8" x 38 3/4" x 31 3/8"
<b>DRAWERED</b>					
TSSU-27-8D-2	0/2	N/A	8	1/3	27 7/8" x 30 1/8" x 36 3/4"
TSSU-48-12D-2	1/2	2	12	1/3	48 3/8" x 30 1/8" x 36 3/4"
TSSU-48-12D-4	0/4	N/A	12	1/3	48 3/8" x 30 1/8" x 36 3/4"
TSSU-60-16D-2	1/2	2	16	1/3	60 3/8" x 30 1/8" x 36 3/4"
TSSU-60-16D-4	0/4	N/A	16	1/3	60 3/8" x 30 1/8" x 36 3/4"

All models listed are available with optional crumb catcher

All models listed are available with optional 19" cutting board (excludes dual sided & drawered models)

\* Height does not include 6 1/4" for castors or 6" for optional legs

† Depth does not include 1" for rear bumpers

\*\* Length dimension does not include 1/8" (each side) for lid pins, TSSU-27's only

Note: Door/drawer combination cabinets require customer to designate door/drawer orientation

## MEGA TOP SANDWICH/SALAD UNITS

MODEL	DOORS	# OF SHELVES	# OF PANS	HP	L** X D† X H*
<b>MEGA-TOPS</b>					
TSSU-27-12M-B	1	2	12	1/3	27 7/8" x 34 1/8" x 40 3/8"
TSSU-27-12M-C	1	2	12	1/3	27 7/8" x 34 1/8" x 40 3/8"
TSSU-36-12M-B	2	4	12	1/3	36 3/8" x 34 1/8" x 40 3/8"
TSSU-48-12M-B	2	4	12	1/3	48 3/8" x 34 1/8" x 40 3/8"
TSSU-48-15M-B	2	4	15	1/3	48 3/8" x 34 1/8" x 40 3/8"
TSSU-48-18M-B	2	4	18	1/3	48 3/8" x 34 1/8" x 40 3/8"
TSSU-60-24M-B-ST	2	4	24	1/3	60 3/8" x 34 1/8" x 40 3/8"
TSSU-72-30M-B-ST	3	6	30	1/2	72 3/8" x 34 1/8" x 40 3/8"
<b>DUAL SIDED MODELS</b>					
TSSU-60-24M-B-DS-ST	2	4	24	1/3	60 3/8" x 40 3/8" x 31 3/8"
TSSU-72-30M-B-DS-ST	3	6	30	1/2	72 3/8" x 41 3/8" x 31 3/8"

\* Height does not include 6 1/4" for castors or 6" for optional legs

† Depth dimension does not include 1" for rear bumpers or 6 1/4" on dual sided models for cutting boards

\*\* Length dimension does not include 1/8" (each side) for lid pins, TSSU-27's only and 1/4" each side for cutting board brackets on Mega Top Dual Sided models

## PIZZA PREP TABLES

MODEL	DOORS/ DRAWERS	# OF SHELVES	# OF PANS	HP	L** X D† X H*
TPP-44	1/0	2	6	1/3	44 1/2" x 32 1/4" x 35 3/4"
TPP-60	2/0	4	8	1/3	60 1/4" x 32 1/4" x 35 3/4"
TPP-67	2/0	4	9	1/3	67 1/4" x 32 1/4" x 35 3/4"
TPP-93	3/0	6	12	1/2	93 1/4" x 32 1/4" x 35 3/4"
TPP-119	4/0	8	15	1/2	119 1/4" x 32 1/4" x 35 3/4"
<b>DRAWERED</b>					
TPP-44D-2	0/2	N/A	6	1/3	44 1/2" x 32 1/4" x 35 3/4"
TPP-60D-2	1/2	2	8	1/3	60 1/4" x 32 1/4" x 35 3/4"
TPP-67D-2	1/2	2	9	1/3	67 1/4" x 32 1/4" x 35 3/4"
TPP-67D-4	0/4	N/A	9	1/3	67 1/4" x 32 1/4" x 35 3/4"
TPP-93D-2	2/2	4	12	1/2	93 1/4" x 32 1/4" x 35 3/4"
TPP-93D-4	1/4	2	12	1/2	93 1/4" x 32 1/4" x 35 3/4"
TPP-93D-6	0/6	N/A	12	1/2	93 1/4" x 32 1/4" x 35 3/4"
TPP-119D-2	3/2	6	15	1/2	119 1/4" x 32 1/4" x 35 3/4"
TPP-119D-4	2/4	4	15	1/2	119 1/4" x 32 1/4" x 35 3/4"
TPP-119D-6	1/6	2	15	1/2	119 1/4" x 32 1/4" x 35 3/4"
TPP-119D-8	0/8	N/A	15	1/2	119 1/4" x 32 1/4" x 35 3/4"

\* Height does not include 6 1/4" for castors or 6" for optional legs

† Depth dimension does not include 3" for cutting boards and 1" for rear bumpers and 1/4" for front bumper

\*\* Length dimension does not include 1/4" (each side) for cutting board brackets and 1/8" each side for lid pins on TPP-60, TPP-60D-2, TPP-67, TPP-67D-2 and TPP-67D-4

Note: Door/drawer combination cabinets require customer to designate door/drawer orientation

## Deli Cases

### FEATURES / BENEFITS

- Oversized, environmentally friendly (134A) gravity coil refrigeration system. Gravity coil provides high humidity to preserve sliced meats and deli products. Capillary metering assures constant regulation of refrigerant flow
- Refrigerator holds ideal 38° to 40°F case temperature for fresher deli products
- Interior - attractive, NSF approved, white aluminum sides and top, 300 series stainless steel floor with coved corners, TCGG-S has stainless steel interior and exterior, 300 series stainless steel floor with coved corners
- Each deli is designed with energy efficient, "Low-E", thermal glass, extra large product viewing glass to maximize your cold product presentations. The Single, Counter-Height also has a 13° slanted glass to minimize reflection from overhead lighting
- Fluorescent lamps are low UV emitting - red meats are enhanced in faithful color
- Foamed-in-place high density polyurethane insulation (CFC free)
- Positive seal self-closing door preserves interior humidity
- Automatic defrost time clock
- Self-contained system
- Available with optional legs or 2½" or 4" diameter castors (not available for TCGG-72-S)
- Remote units available

### SINGLE-DUTY UNITS HAVE...

- Exterior - durable and permanent non-peel or chip white laminated vinyl
- Versatile and durable stainless steel top provides surface for support equipment such as registers and point-of-purchase novelties
- Exclusive front and rear interior lighting. Three product illuminating light sources for brilliant product display (TSID-72)
- Lamps are safety shielded - assures longer, brighter, shadow-free product illumination. Lighting tubes can be replaced without removing product
- Adjustable, heavy duty, wire shelves - 10 mil thick, pure grade PVC coating

### LOW-HEIGHT UNITS HAVE...

- Combines efficient, high-volume merchandising with the perfect overall height for fast paced sales transactions - ideal for convenience and petroleum stores
- Refrigerator holds ideal 38° to 40°F case temperature for fresher deli products
- Exterior - durable and permanent non-peel or chip white laminated vinyl
- Versatile and durable stainless steel top provides surface for support equipment such as registers and point-of-purchase novelties
- Exclusive front and rear interior lighting
- Lamps are safety shielded - assures longer, brighter, shadow-free product illumination. Lighting tubes can be replaced without removing product
- Adjustable, heavy duty, wire shelves - 10 mil thick, pure grade PVC coating

### DOUBLE-DUTY UNITS HAVE...

- Stainless steel exterior (white laminated vinyl rear louvered grills)
- Refrigerated lower rear storage
- 115V receptacle for scales or slicers
- Exclusive front and rear interior lighting
- Adjustable upper stainless steel shelf. One level of shelving standard (extra stainless steel shelf is optional for TDBD-72's only)
- Each deli is designed with energy efficient, "Low-E", thermal product viewing glass to maximize your cold product presentations
- Space saving design

### CURVED GLASS UNITS HAVE...

- Oversized, environmentally friendly (134A) gravity coil refrigeration system
- Exterior - durable and permanent non-peel or chip white laminated vinyl with stainless steel top and trim (stainless steel exterior and interior available for additional charge)
- Exclusive top and shelf positioned interior lighting
- Adjustable, white heavy duty wire shelves - 10 mil thick, pure grade PVC coating
- Optional stainless steel mezzanine shelves available
- Insulated, double pane curved glass front provides extra large viewing area to maximize your cold product presentations, both panes are tempered for safety
- Central electrical connections
- Space saving design
- TCGG models are designed to operate in an environment where temperature & humidity do not exceed 75°F and 55% relative humidity
- 4 amp exterior scale receptacle



### SINGLE-DUTY DELI CASES # OF

MODEL	DOORS	SHELVES	HP	L X D X H
TSID-48-2	2	2	1/3	48½" x 29¼" x 50¼"
TSID-48-4	4	2	1/3	48½" x 29¼" x 50¼"
TSID-72-3	3	2	1/2	72½" x 29¼" x 50¼"
TSID-72-6	6	2	1/2	72½" x 29¼" x 50¼"
TSID-96-3	3	4	1/2	96½" x 29¼" x 50¼"
TSID-96-6	6	4	1/2	96½" x 29¼" x 50¼"

### LOW-HEIGHT SINGLE-DUTY DELI CASES

MODEL	DOORS	SHELVES	HP	L X D X H
TSID-48-2-L	2	1	1/3	48½" x 32½" x 42"
TSID-48-4-L	4	1	1/3	48½" x 29¼" x 42"
TSID-72-3-L	3	1	1/3	72½" x 32½" x 42"
TSID-72-6-L	6	1	1/3	72½" x 32½" x 42"

### DOUBLE-DUTY DELI CASES STAINLESS

MODEL	DOORS	SHELVES	HP	L X D X H
TDBD-72-2	2	1	1/2	72½" x 35½" x 55"
TDBD-72-4	4	1	1/2	72½" x 35½" x 55"
TDBD-96-3	3	2	3/4	96½" x 35½" x 55"
TDBD-96-6	6	2	3/4	96½" x 35½" x 55"

### CURVED GLASS DELI CASES WHITE VINYL WITH S/S TOP & TRIM # OF

MODEL	DOORS	SHELVES	HP	L X D† X H
TCGG-48	2	2	1/3	48¼" x 35¼" x 47¾"
TCGG-72	2	2	3/4	72¼" x 35¼" x 47¾"

### CURVED GLASS DELI CASES S/S INTERIOR & EXTERIOR

MODEL	DOORS	SHELVES	HP	L X D† X H
TCGG-48-S	2	2	1/3	48¼" x 35¼" x 47¾"
TCGG-72-S	2	2	3/4	72¼" x 35¼" x 47¾"

† Depth does not include ¾" for rear door handles



TSID-96-3



TSID-48-2-L



TCGG-48

# REFRIGERATION Undercounter Worktops

## FEATURES / BENEFITS

- Oversized, environmentally friendly refrigeration system
- Refrigerator holds 33° to 38°F temperature; freezer holds -10°F
- 360° circular airflow for uniform product cooling
- All stainless steel front, top and sides
- Interior - attractive, NSF approved, white aluminum sides and top, coved corners and 300 series stainless steel floor
- Aluminum finished back
- Energy efficient, "Low-E", thermal glass on glass door models
- Front breathing
- Self-contained system
- Adjustable, heavy duty, PVC coated wire shelves
- Foamed-in-place high density polyurethane insulation
- 5" diameter castors standard equipment (legs available)

- Work surface 36" high
  - Heavy, 16 gauge tops available
  - Automatic freezer defrost system
- WORKTOP UNITS HAVE...**
- Stainless steel backsplash - one piece formed construction

**True**®

## DEEP UNITS HAVE...

- Features the combined advantage of convenient undercounter placement or worktop prep space with deeper refrigerated storage
- Door models accommodate half bun tray rack; applies to only one door of TUC-60-32 & TWT-60-32 (18" x 26" sheet pan) - not included



TUC-60G

## UNDERCOUNTERS

MODEL	DOORS/ DRAWERS	# OF SHELVES	HP	L X D† X H*
<b>REFRIGERATORS</b>				
TUC-27	1/0	2	1/6	27 1/2" x 30 1/8" x 29 3/4"
TUC-36	2/0	4	1/6	36 1/2" x 30 1/8" x 29 3/4"
TUC-48	2/0	4	1/6	48 1/2" x 30 1/8" x 29 3/4"
TUC-60	2/0	4	1/6	60 1/2" x 30 1/8" x 29 3/4"
TUC-72	3/0	6	1/6	72 1/2" x 30 1/8" x 29 3/4"
<b>FREEZERS</b>				
TUC-27F	1/0	2	1/6	27 1/2" x 30 1/8" x 29 3/4"
TUC-48F	2/0	4	1/6	48 1/2" x 30 1/8" x 29 3/4"
TUC-60F	2/0	4	1/2	60 1/2" x 30 1/8" x 29 3/4"
<b>GLASS DOOR REFRIGERATORS</b>				
TUC-27G	1/0	2	1/6	27 1/2" x 30 1/8" x 29 3/4"
TUC-48G	2/0	4	1/6	48 1/2" x 30 1/8" x 29 3/4"
TUC-60G	2/0	4	1/6	60 1/2" x 30 1/8" x 29 3/4"
<b>DRAWERED REFRIGERATORS</b>				
TUC-27D-2	0/2	N/A	1/6	27 1/2" x 30 1/8" x 29 3/4"
TUC-48D-2	1/2	2	1/6	48 1/2" x 30 1/8" x 29 3/4"
TUC-48D-4	0/4	N/A	1/6	48 1/2" x 30 1/8" x 29 3/4"
TUC-60D-2	1/2	2	1/6	60 1/2" x 30 1/8" x 29 3/4"
TUC-60D-4	0/4	N/A	1/6	60 1/2" x 30 1/8" x 29 3/4"
<b>DRAWERED FREEZERS</b>				
TUC-27F-D-2	0/2	N/A	1/6	27 1/2" x 30 1/8" x 29 3/4"
TUC-48F-D-4	0/4	N/A	1/6	48 1/2" x 30 1/8" x 29 3/4"
<b>DEEP UNDERCOUNTERS</b>				
<b>REFRIGERATORS</b>				
TUC-44	1/0	2	1/6	44 1/2" x 32 1/4" x 29 3/4"
TUC-60-32	2/0	4	1/6	60 1/4" x 32 1/4" x 29 3/4"
TUC-67	2/0	4	1/6	67 1/4" x 32 1/4" x 29 3/4"
TUC-93	3/0	6	1/2	93 1/4" x 32 1/4" x 29 3/4"
<b>FREEZERS</b>				
TUC-44F	1/0	2	1/6	44 1/2" x 32 1/4" x 29 3/4"
TUC-60-32F	2/0	4	1/2	60 1/4" x 32 1/4" x 29 3/4"
TUC-67F	2/0	4	3/4	67 1/4" x 32 1/4" x 29 3/4"
<b>DRAWERED REFRIGERATORS</b>				
TUC-44D-2	0/2	N/A	1/6	44 1/2" x 32 1/4" x 29 3/4"
TUC-60-32D-2	1/2	2	1/6	60 1/4" x 32 1/4" x 29 3/4"
TUC-67D-2	1/2	2	1/6	67 1/4" x 32 1/4" x 29 3/4"
TUC-67D-4	0/4	N/A	1/6	67 1/4" x 32 1/4" x 29 3/4"
TUC-93D-2	2/2	4	1/2	93 1/4" x 32 1/4" x 29 3/4"
TUC-93D-4	1/4	2	1/2	93 1/4" x 32 1/4" x 29 3/4"
TUC-93D-6	0/6	N/A	1/2	93 1/4" x 32 1/4" x 29 3/4"

\* Height does not include 6 1/4" for castors or 6" for optional legs

† Depth does not include 1" for rear bumpers or 1/4" for front bumpers

Note: Door/drawer combination cabinets require customer to designate door/drawer orientation

## WORKTOPS

MODEL	DOORS/ DRAWERS	# OF SHELVES	HP	L X D† X H*
<b>REFRIGERATORS</b>				
TWT-27	1/0	2	1/6	27 1/2" x 30 1/8" x 33 3/8"
TWT-36	2/0	4	1/6	36 1/2" x 30 1/8" x 33 3/8"
TWT-48	2/0	4	1/6	48 1/2" x 30 1/8" x 33 3/8"
TWT-60	2/0	4	1/6	60 1/2" x 30 1/8" x 33 3/8"
TWT-72	3/0	6	1/6	72 1/2" x 30 1/8" x 33 3/8"
<b>FREEZERS</b>				
TWT-27F	1/0	2	1/6	27 1/2" x 30 1/8" x 33 3/8"
TWT-48F	2/0	4	1/6	48 1/2" x 30 1/8" x 33 3/8"
TWT-60F	2/0	4	1/2	60 1/2" x 30 1/8" x 33 3/8"
<b>DRAWERED REFRIGERATORS</b>				
TWT-27D-2	0/2	N/A	1/6	27 1/2" x 30 1/8" x 33 3/8"
TWT-48D-2	1/2	2	1/6	48 1/2" x 30 1/8" x 33 3/8"
TWT-48D-4	0/4	N/A	1/6	48 1/2" x 30 1/8" x 33 3/8"
TWT-60D-2	1/2	2	1/6	60 1/2" x 30 1/8" x 33 3/8"
TWT-60D-4	0/4	N/A	1/6	60 1/2" x 30 1/8" x 33 3/8"
<b>DEEP WORKTOPS</b>				
<b>REFRIGERATORS</b>				
TWT-44	1/0	2	1/6	44 1/2" x 32 1/4" x 33 3/8"
TWT-60-32	2/0	4	1/6	60 1/4" x 32 1/4" x 33 3/8"
TWT-67	2/0	4	1/6	67 1/4" x 32 1/4" x 33 3/8"
TWT-93	3/0	6	1/2	93 1/4" x 32 1/4" x 33 3/8"
<b>FREEZERS</b>				
TWT-44F	1/0	2	1/6	44 1/2" x 32 1/4" x 33 3/8"
TWT-60-32F	2/0	4	1/2	60 1/4" x 32 1/4" x 33 3/8"
TWT-67F	2/0	4	3/4	67 1/4" x 32 1/4" x 33 3/8"
<b>DRAWERED REFRIGERATORS</b>				
TWT-44D-2	0/2	N/A	1/6	44 1/2" x 32 1/4" x 33 3/8"
TWT-60-32D-2	1/2	2	1/6	60 1/4" x 32 1/4" x 33 3/8"
TWT-67D-2	1/2	2	1/6	67 1/4" x 32 1/4" x 33 3/8"
TWT-67D-4	0/4	N/A	1/6	67 1/4" x 32 1/4" x 33 3/8"
TWT-93D-2	2/2	4	1/2	93 1/4" x 32 1/4" x 33 3/8"
TWT-93D-4	1/4	2	1/2	93 1/4" x 32 1/4" x 33 3/8"
TWT-93D-6	0/6	N/A	1/2	93 1/4" x 32 1/4" x 33 3/8"

\* Height does not include 6 1/4" for castors or 6" for optional legs

† Depth does not include 1" for rear bumpers or 1/4" for front bumper

Note: Door/drawer combination cabinets require customer to designate door/drawer orientation



# Back Bar Coolers REFRIGERATION

## Back Bar Coolers

### FEATURES / BENEFITS

- Oversized, environmentally friendly (134A) forced-air refrigeration system maintains cold 33° to 38°F product temperatures
- Attractive, wear-resistant laminated heavy duty black vinyl exterior, except stainless steel models
- Heavy gauge all stainless steel countertop
- Interior - 300 series stainless steel floor with ½" lip & heavy galvanized steel walls. NSF approved for pre-packaged and bottled goods
- Versatile flat top slides easily under bar or can be used as a counter/storage space
- Recessed handles on solid door models
- 10 mil thick, heavy duty, black PVC coated wire shelving - 2 per door
- Foamed-in-place using Ecomate, a high density polyurethane insulation that has zero ozone depletion and zero global warming potential
- Bright fluorescent interior lighting for excellent visibility
- Door locks - standard
- Self-contained system

### PASS THRU MODEL

- Designed for convenient rear loading and front access for serving

### GLASS DOOR MODELS

- Energy efficient, "Low-E", thermal glass doors
- Extruded, aluminum door frames on glass doors

### DIRECT DRAW MODEL

- 3" diameter stainless steel insulated beer columns
- Fan motors direct large volume of cold air into draft columns
- Designed to accommodate a variety of beer kegs

### 24" UNITS HAVE...

- 24" depth makes for easy placement in tight areas. Conserves valuable work space
- TBB-24 models feature a finished stainless steel top providing an excellent work or storage area. TBB-24GAL models feature a galvanized steel top designed to slide under existing cabinetry providing a built-in look



**TBB-3G-S  
(SHOWN WITH  
OPTIONAL  
ORGANIZERS)**



**TBB-2G**



**TDB-24-48-1-G-1**

### BACK BAR COOLERS

MODEL	12 OZ CANS	1/2 BARRELS	DOORS	# OF SHELVES	HP	L X D† X H
<b>TBB-2</b>	88 6-packs	2	2	4	1/3	58 7/8" x 27 3/4" x 37"
<b>TBB-3</b>	112 6-packs	3	2	4	1/3	69 1/8" x 27 3/4" x 37"
<b>TBB-4</b>	152 6-packs	4	3	6	1/3	90 5/8" x 27 3/4" x 37"
<b>PASS THRU</b>						
<b>TBB-4PT</b>	152 6-packs	4	6	6	1/2	90 5/8" x 31" x 37"
<b>GLASS DOORS</b>						
<b>TBB-2G*</b>	88 6-packs	2	2	4	1/3	58 7/8" x 27 3/4" x 37"
<b>TBB-3G</b>	112 6-packs	3	2	4	1/2	69 1/8" x 27 3/4" x 37"
<b>TBB-4G</b>	152 6-packs	4	3	6	1/2	90 5/8" x 27 3/4" x 37"

### STAINLESS STEEL BACK BAR COOLERS

<b>TBB-2-S</b>	88 6-packs	2	2	4	1/3	58 7/8" x 27 3/4" x 37"
<b>TBB-3-S</b>	112 6-packs	3	2	4	1/3	69 1/8" x 27 3/4" x 37"
<b>TBB-4-S</b>	152 6-packs	4	3	6	1/3	90 5/8" x 27 3/4" x 37"
<b>PASS THRU</b>						
<b>TBB-4PT-S</b>	152 6-packs	4	6	6	1/2	90 5/8" x 31" x 37"
<b>GLASS DOORS</b>						
<b>TBB-2G-S*</b>	88 6-packs	2	2	4	1/3	58 7/8" x 27 3/4" x 37"
<b>TBB-3G-S</b>	112 6-packs	3	2	4	1/2	69 1/8" x 27 3/4" x 37"
<b>TBB-4G-S</b>	152 6-packs	4	3	6	1/2	90 5/8" x 27 3/4" x 37"

\* Unavailable with door locks

† Depth does not include 1 5/8" for door handle (glass door models) or 1" for rear bumpers



### 24" BACK BAR COOLERS (SWING DOORS)

MODEL	12 OZ CANS	DOORS	# OF SHELVES	HP	L X D† X H
<b>TBB-24-48</b>	48 6-packs	2	4	1/3	49 1/8" x 24 1/2" x 35 5/8"
<b>TBB-24GAL-48</b>	48 6-packs	2	4	1/3	47 7/8" x 23 3/4" x 34 1/4"
<b>TBB-24-60</b>	72 6-packs	2	4	1/3	61 1/8" x 24 1/2" x 35 5/8"
<b>TBB-24GAL-60</b>	72 6-packs	2	4	1/3	59 7/8" x 23 3/4" x 34 1/4"
<b>TBB-24-72</b>	84 6-packs	3	4	1/3	73 1/8" x 24 1/2" x 35 5/8"
<b>GLASS DOOR</b>					
<b>TBB-24-48G</b>	48 6-packs	2	4	1/3	49 1/8" x 24 1/2" x 35 5/8"
<b>TBB-24GAL-48G</b>	48 6-packs	2	4	1/3	47 7/8" x 24 1/4" x 34 1/4"
<b>TBB-24-60G</b>	72 6-packs	2	4	1/3	61 1/8" x 24 1/2" x 35 5/8"
<b>TBB-24GAL-60G</b>	72 6-packs	2	4	1/3	59 7/8" x 24 1/4" x 34 1/4"
<b>STAINLESS STEEL</b>					
<b>TBB-24-48-S</b>	48 6-packs	2	4	1/3	49 1/8" x 24 1/2" x 35 5/8"
<b>TBB-24GAL-48-S</b>	48 6-packs	2	4	1/3	47 7/8" x 23 3/4" x 34 1/4"
<b>TBB-24-60-S</b>	72 6-packs	2	4	1/3	61 1/8" x 24 1/2" x 35 5/8"
<b>TBB-24GAL-60-S</b>	72 6-packs	2	4	1/3	59 7/8" x 23 3/4" x 34 1/4"
<b>STAINLESS STEEL GLASS DOORS</b>					
<b>TBB-24-48G-S</b>	48 6-packs	2	4	1/3	49 1/8" x 24 1/4" x 35 5/8"
<b>TBB-24GAL-48G-S</b>	48 6-packs	2	4	1/3	47 7/8" x 24 1/4" x 34 1/4"
<b>TBB-24-60G-S</b>	72 6-packs	2	4	1/3	61 1/8" x 24 1/4" x 35 5/8"
<b>TBB-24GAL-60G-S</b>	72s 6-packs	2	4	1/3	59 7/8" x 24 1/4" x 34 1/4"

### 24" BACK BAR COOLER (SLIDE GLASS DOOR)

MODEL	12 OZ CANS	DOORS	# OF SHELVES	HP	L X D† X H
<b>TBB-24-48G-SD</b>	48 6-packs	2	4	1/3	49 1/8" x 24 1/2" x 35 5/8"

### 24" BACK BAR/DIRECT DRAW BEER DISPENSERS

MODEL	(LEFT DR.) 1/2 BARRELS	(RIGHT DR.) 12 OZ CANS	DOORS	# OF SHELVES	HP	L X D† X H*
<b>SOLID DOORS</b>						
<b>TDB-24-48</b>	1	144	2	2	1/3	49 1/8" x 24 1/2" x 35 5/8"
<b>GLASS DOORS</b>						
<b>TDB-24-48G</b>	1	144	2	2	1/3	49 1/8" x 24 1/2" x 35 5/8"
<b>COMBO DOORS</b>						
<b>TDB-24-48-1-G-1</b>	1	144	2	2	1/3	49 1/8" x 24 1/2" x 35 5/8"

\* Add 15 1/4" to height for draft arm

† Depth does not include 1 5/8" for door handle (glass door models only) or 1" for rear bumper

# REFRIGERATION Beer Dispensers

## Direct Draw

### FEATURES / BENEFITS

- Oversized environmentally friendly (134A) forced-air refrigeration system for maximum performance
- Provides ice cold products 33° to 38°F (normal ambient conditions)
- Attractive, wear-resistant laminated heavy duty black vinyl exterior
- Heavy gauge all stainless steel countertop
- Interior - 300 series stainless steel floor with ½" lip & heavy galvanized steel walls
- Interior - NSF approved for pre-packaged and bottled goods
- 3" diameter stainless steel insulated beer columns
- Door locks - standard
- Recessed handles
- Available with optional legs or 2½" or 4" diameter castors (TDD-1/-S: 4" dia castors standard equipment; 2½" dia castors and legs not available)
- Each cabinet designed to accommodate all types of beer kegs

### DIRECT DRAW UNITS HAVE...

- Fan motors direct large volume of cold air into draft columns
- Incandescent interior lighting (excluding TDD-1)
- Air vents on side to maximize flow of fresh air through condenser

### CLUB TOP UNITS HAVE...

- Easy to reach refrigerated storage area for chilled beer or wine glasses
- Anodized aluminum glass rail provides convenient storage area for glasses on top
- One, 10 mil thick, heavy duty, black PVC coated wire shelf standard (glass storage area)
- Convenient easy-glide lid
- Flip-lock to secure stainless steel lid

### STAINLESS STEEL MODELS

- Stainless steel exterior and countertop for those who appreciate the value of stainless



TDD-1



TDD-3CT-S



TDD-4-S



### DIRECT DRAW BEER DISPENSERS

MODEL	½ BARRELS	DOORS	HP	L X D X H*
TDD-1	1	1	⅓	23½" x 31¼" x 39¾"
TDD-2	2	2	⅓	58⅞" x 27⅞" x 37"
TDD-3	3	2	⅓	69⅞" x 27⅞" x 37"
TDD-4	4	3	⅓	90⅞" x 27⅞" x 37"

### STAINLESS STEEL

TDD-1-S	1	1	⅓	23½" x 31¼" x 39¾"
TDD-2-S	2	2	⅓	58⅞" x 27⅞" x 37"
TDD-3-S	3	2	⅓	69⅞" x 27⅞" x 37"
TDD-4-S	4	3	⅓	90⅞" x 27⅞" x 37"

### CLUB TOP DIRECT DRAW BEER DISPENSERS

MODEL	½ BARRELS	DOORS	# OF SHELVES	HP	L X D X H*
TDD-2CT	2	2	1	⅓	58⅞" x 27⅞" x 38½"
TDD-3CT	3	2	1	⅓	69⅞" x 27⅞" x 38½"
TDD-4CT	4	3	1	⅓	90⅞" x 27⅞" x 38½"

### STAINLESS STEEL

TDD-2CT-S	2	2	1	⅓	58⅞" x 27⅞" x 38½"
TDD-3CT-S	3	2	1	⅓	69⅞" x 27⅞" x 38½"
TDD-4CT-S	4	3	1	⅓	90⅞" x 27⅞" x 38½"

\* Height does not include 13¼" for draft arm on Club Top Models

\* Height does not include 15¼" for draft arm on Direct Draw Models

## Glass & Plate Chillers & Frosters

### FEATURES / BENEFITS

- Oversized, environmentally friendly (R404A) refrigeration system
- Holds 0°F and below
- Save time - load glasses dry and frost even faster with temperature 0°F and below
- Your choice of attractive, wear-resistant laminated heavy duty black vinyl or stainless steel exterior
- All stainless steel countertop and lids
- Interior - long lasting heavy duty galvanized steel. NSF approved for prepackaged and bottled goods
- Largest storage capacity in the industry - meets supply and demand requirements during peak hours
- Automatic defrost system
- Foamed-in-place, high density polyurethane insulation (CFC free)
- Heavy duty PVC coated wire shelves for maximum flexibility
- Self-contained system

T-50-GC



### GLASS & PLATE CHILLERS/FROSTERS

MODEL	CAPACITY (8" MUGS / 10 OZ. STEINS)	# OF SHELVES	HP	L X D† X H
T-24-GC	90 / 85	2	¼	24¾" x 26⅞" x 33¾"
T-36-GC	180 / 172	3	⅓	36¾" x 26⅞" x 33¾"
T-50-GC	250 / 240	5	⅓	49⅞" x 26⅞" x 33¾"

### STAINLESS STEEL

T-24-GC-S	90 / 85	2	¼	24¾" x 26⅞" x 33¾"
T-36-GC-S	180 / 172	3	⅓	36¾" x 26⅞" x 33¾"
T-50-GC-S	250 / 240	5	⅓	49⅞" x 26⅞" x 33¾"

† Depth does not include 1" for rear bumpers

## Bottle Coolers

### FEATURES / BENEFITS

- Oversized, environmentally friendly (134A) refrigeration system
- Provides ice cold products 33° to 38°F - very fast pull-down capacity
- Positive guided, forced air cooling - cools bottles on top first
- Attractive, wear-resistant laminated heavy duty black vinyl exterior
- All stainless steel countertop and lids
- Interior - long lasting heavy duty galvanized steel. NSF approved for pre-packaged and bottled goods
- Huge capacity requires minimum floor space
- Large evaporator coil virtually runs length of cooler for efficient balanced cooling
- Foamed-in-place, Ecomate
- Heavy duty 10 mil thick pure grade PVC coated adjustable bin dividers for maximum storage use

### STAINLESS STEEL MODELS

- Stainless steel exterior, countertop and lids for those who appreciate the value of stainless

**True**®



TD-95-38



TD-50-18-S



TD-24-7

### HORIZONTAL BOTTLE COOLERS - DEEP WELL

MODEL	# OF LIDS	CAPACITY (12 OZ BTLS.* / 12 OZ CANS)	BIN DIVIDERS	HP	L X D† X H
TD-24-7	1	4½ cases / 6 cases	2	1/6	24¾" x 26¾" x 33¾"
TD-36-12	1	11 cases / 14½ cases	2	1/6	36¾" x 26¾" x 33¾"
TD-50-18	2	16½ cases / 24 cases	3	1/3	49¾" x 26¾" x 33¾"
TD-65-24	2	22 cases / 32½ cases	4	1/3	64¾" x 26¾" x 33¾"
TD-80-30	3	30 cases / 42 cases	6	1/3	80½" x 26¾" x 33¾"
TD-95-38	3	37½ cases / 55 cases	7	1/2	95¾" x 26¾" x 33¾"

### STAINLESS STEEL

TD-24-7-S	1	4½ cases / 6 cases	2	1/6	24¾" x 26¾" x 33¾"
TD-36-12-S	1	11 cases / 14½ cases	2	1/6	36¾" x 26¾" x 33¾"
TD-50-18-S	2	16½ cases / 24 cases	3	1/3	49¾" x 26¾" x 33¾"
TD-65-24-S	2	22 cases / 32½ cases	4	1/3	64¾" x 26¾" x 33¾"
TD-80-30-S	3	30 cases / 42 cases	6	1/3	80½" x 26¾" x 33¾"
TD-95-38-S	3	37½ cases / 55 cases	7	1/2	95¾" x 26¾" x 33¾"

\* 12 oz longneck bottles

† Depth does not include 1½" for cap catcher and 1" for rear bumpers

**True**®



# REFRIGERATION Chef Bases, Milk Coolers

## Chef Bases

### FEATURES / BENEFITS

- Oversized, environmentally friendly refrigeration system (134A)
- Holds 33° to 38°F temperature
- All stainless steel front, top and sides
- Interior - attractive, NSF approved, white aluminum liner 300 series stainless steel floor with coved corners
- Chef base top is made of one-piece heavy-duty, reinforced stainless steel with drip guard. True's drip resistant "V" edge protects against spills
- Top is insulated to eliminate heat transfer to interior of cabinet
- 4" diameter castors standard equipment (legs available)
- Strong, durable construction. TRCB-52 countertop supports up to 717 pounds of equipment. TRCB-79-86/82 countertop support up to 1,084 pounds of equipment TRCB-110 countertop supports up to 2,000 pounds of equipment
- Exterior mounted digital temperature monitor
- Feature recessed handles
- Foamed-in-place using Ecomate, a high density polyurethane insulation that has zero ozone depletion and zero global warming potential
- Self-contained system
- Accommodates two 12"l x 20"w x 4"d pans per drawer (TRCB-52 & left side drawers of TRCB-82 accommodate three 12"l x 20"w x 4"d pans per drawer) pans not included
- Each drawer is equipped with full perimeter magnetic gaskets (removable for cleaning)
- TRCB-79-86 & TRCB-82-86 features extended heavy duty top for additional equipment space

**True®**



TRCB-52



TRCB-79-86

### CHEF BASES

MODEL	DRAWERS	HP	L X D† X H*
TRCB-52	2	1/3	51 1/8" x 32 1/8" x 20 3/8"
TRCB-79	4	1/3	79 1/4" x 30 1/2" x 20 3/8"
TRCB-79-86	4	1/3	86 1/4" x 30 1/2" x 20 3/8"
TRCB-82	4	1/3	82 3/8" x 32 1/8" x 20 3/8"
TRCB-82-86	4	1/3	86 1/4" x 32 1/8" x 20 3/8"
TRCB-110	6	1/3	110" x 30 1/2" x 20 3/8"

\* Height does not include 5" for castors or 6" for optional legs

† Depth does not include 1" for rear bumpers

## Milk Coolers

### FEATURES / BENEFITS

- Environmentally friendly (134A) forced-air refrigeration system designed to create colder temperatures for improved milk safety
- Holds milk 33° to 38°F
- Stainless steel or combination stainless/white vinyl exterior
- Reinforced, 300 series stainless steel interior floor
- Interior - attractive, NSF approved, white aluminum (300 series stainless steel available as an upcharge)
- Digital thermometer standard for easy visibility
- Easy-roll, all swivel 4" diameter castors (front castors lock in place)
- Locks standard
- Heavy duty floor rack standard
- Convenient clean out drain standard
- Dual sided models offer convenient, efficient access to refrigerated product
- Self-service doors feature convenient drop front and flip-up top
- Self-contained system



TMC-49-S

### MILK COOLERS

(WHITE ALUMINUM INTERIOR/WHITE VINYL & STAINLESS STEEL EXTERIOR)

MODEL	DOORS	CRATE CAP.	FLOOR RACKS	HP	L X D† X H*
TMC-34	2	8	2	1/3	34" x 33 3/8" x 41 1/2"
TMC-49	2	12	3	1/3	49" x 33 3/8" x 41 1/2"
TMC-58	2	16	3	1/3	58" x 33 3/8" x 41 1/2"

### DUAL SIDED

TMC-49-DS	4	12	3	1/2	49" x 33 3/8" x 41 1/8"
TMC-58-DS	4	16	3	1/2	58" x 33 3/8" x 41 1/8"

(WHITE ALUMINUM INTERIOR/STAINLESS STEEL EXTERIOR)

TMC-34-S	2	8	2	1/3	34" x 33 3/8" x 41 1/2"
TMC-49-S	2	12	3	1/3	49" x 33 3/8" x 41 1/2"
TMC-58-S	2	16	3	1/3	58" x 33 3/8" x 41 1/2"

### DUAL SIDED

TMC-49-S-DS	4	12	3	1/2	49" x 33 3/8" x 41 1/8"
TMC-58-S-DS	4	16	3	1/2	58" x 33 3/8" x 41 1/8"

(STAINLESS STEEL INTERIOR/WHITE VINYL & STAINLESS STEEL EXTERIOR)

TMC-34-SS	2	8	2	1/3	34" x 33 3/8" x 41 1/2"
TMC-49-SS	2	12	3	1/3	49" x 33 3/8" x 41 1/2"
TMC-58-SS	2	16	3	1/3	58" x 33 3/8" x 41 1/2"

### DUAL SIDED

TMC-49-DS-SS	4	12	3	1/2	49" x 33 3/8" x 41 1/8"
TMC-58-DS-SS	4	16	3	1/2	58" x 33 3/8" x 41 1/8"

(STAINLESS STEEL INTERIOR/STAINLESS STEEL EXTERIOR)

TMC-34-S-SS	2	8	2	1/3	34" x 33 3/8" x 41 1/2"
TMC-49-S-SS	2	12	3	1/3	49" x 33 3/8" x 41 1/2"
TMC-58-S-SS	2	16	3	1/3	58" x 33 3/8" x 41 1/2"

### DUAL SIDED

TMC-49-S-DS-SS	4	12	3	1/2	49" x 33 3/8" x 41 1/8"
TMC-58-S-DS-SS	4	16	3	1/2	58" x 33 3/8" x 41 1/8"

† Depth does not include 1" for door bumpers; dual sided models have bumpers front and back

\* Height does not include additional 3/4" for castor height

# Display Cases REFRIGERATION

## Curved Glass Display Cases

### FEATURES / BENEFITS

- Exterior - standard in white laminate, five additional color options available (no charge). All laminate ships separately from unit and is field installed
- Other custom colors available, contact factory for details (upcharge applies)
- Interior - attractive, NSF approved, white vinyl coated aluminum sides and top, coved corners and high impact plastic floor (TCGR-50-CD has stainless steel interior sides and top)
- Positive seal self-closing rear sliding doors
- Versatile and durable stainless steel top provides surface for support equipment such as registers and point-of-purchase novelties
- Exclusive shelf positioned interior lighting
- Lamps are safety shielded - assures longer, brighter, shadow-free product illumination. Lighting tubes can be replaced without removing product
- Energy efficient, "Low-E", thermal glass slide rear doors
- Adjustable, heavy duty, PVC wire shelves - 10 mil thick, pure grade PVC coating, each shelf supports maximum weight of 150 lb
- Central electrical connections
- NSF-7 certified cabinets hold open food products
- TCGR-50 & TCGD-50 cabinets hold (8) 18" x 26" pans and (4) 9" x 26" pans; TCGR-77 and TCGD-77 cabinets hold (16) 18" x 26" pans
- Remote units available

### REFRIGERATED BAKERY MODEL

- Oversized, environmentally friendly (134A) forced air refrigeration system
- Bakery cases hold ideal 38° to 40°F case temperature for fresher bakery products
- Fluorescent lamps are low UV emitting - products are enhanced in faithful color
- Insulated, double pane curved glass front provides extra large viewing area to maximize bakery product presentations. Tilts forward for easy cleaning. Exterior pane is tempered for safety
- Self-contained system
- Vented kick plate allows front breathing
- Recessed light switch and thermostat
- Foamed-in-place Ecomate (CFC free)
- TCGR models are designed to operate in an environment where temperature & humidity do not exceed 75°F and 55% relative humidity

### NON-REFRIGERATED "DRY" BAKERY MODEL

- Designed to provide an attractive companion to the TCGR cabinet - displays bakery products which do not require refrigeration
- Single pane curved glass front. Tilts forward for easy cleaning. Tempered for safety
- Special "brown bulb" lighting provides a balanced color spectrum that enhances the appearance of bakery products and pastries
- Recessed light switch
- Optional 12" cord set. Factory installed only (exterior scale receptacle will not be included with this option) upcharge applies

### COLD DELI MODEL

- Cold Deli case holds 36° to 38°F, ideal for meats, cheeses and salads
- Three lighting receptacles allow for two additional "optional" lighted shelves

### CURVED GLASS DUAL ZONE MODEL

- Self-contained, environmentally friendly (CFC free) 134A refrigeration system
- Refrigerated section features superior low velocity, high volume airflow design maintains 38° to 40°F (3.3°C to 4.4°C) without drying out product. Ideally suited for delicate bakery products
- Insulated, double pane curved glass front and side panels. Provides extra large viewing area to maximize bakery product presentation. Front glass tilts forward for easy cleaning
- Six (6) adjustable, lighted, cantilevered PVC coated shelves
- Low UV emitting fluorescent lighting system
- Front and sides standard with white laminate panels, five additional color options available at no charge, stainless steel top

**True®**



TCGD-50



TCGR-50



TCGDZ-50

### CURVED GLASS DISPLAY CASES

#### REFRIGERATED BAKERY

MODEL	DOORS	# OF SHELVES	HP	L X D X H
TCGR-50	2	3	1/2	50 7/8" x 35 1/2" x 47 7/8"
TCGR-77	2	3	3/4	77 7/8" x 35 1/2" x 47 7/8"

#### DRY BAKERY

MODEL	DOORS	# OF SHELVES	HP	L X D X H
TCGD-50	2	3	—	50 7/8" x 35 1/2" x 47 7/8"
TCGD-77	2	3	—	77 7/8" x 35 1/2" x 47 7/8"

#### COLD DELI

MODEL	DOORS	# OF SHELVES	HP	L X D X H
TCGR-50-CD	2	1	1/2	50 7/8" x 35 1/2" x 47 7/8"

#### DUAL ZONE

MODEL	DOORS	# OF SHELVES	HP	L X D X H
TCGDZ-50	2	6	1 1/2	50 7/8" x 35 1/2" x 47 7/8"



## Bakery Cases

- Designed for continuous case line-ups
- White wire shelves are adjustable up and down and can also be tilted
- Removable sliding rear doors, shelf lights
- Double-curve tempered front glass
- 37 $\frac{3}{4}$ "w x 48 $\frac{1}{2}$ "h



*The Signature of Quality*



SNR-48SC

### REFRIGERATED BAKERY

**SNR-48SC** 48 $\frac{1}{4}$ " long,  $\frac{1}{2}$  hp  
**SNR-59SC** 59 $\frac{1}{4}$ " long,  $\frac{1}{2}$  hp  
**SNR-77SC** 77 $\frac{1}{4}$ " long,  $\frac{3}{4}$  hp

### NON-REFRIGERATED BAKERY

**SN-48** 48 $\frac{1}{4}$ " long, 1.0 amps  
**SN-59** 59 $\frac{1}{4}$ " long, 1.5 amps  
**SN-77** 77 $\frac{1}{4}$ " long, 2.0 amps

## Refrigerated Deli Cases

- Advanced styling for maximum visual appeal
- Designed for continuous case line-ups
- Lift-up pneumatic, cylinder-assisted double curve tempered front glass
- Four point leveling system
- Removable sliding rear doors and mezzanine shelf (one full length shelf provided)
- Appliance receptacle on the back of case for a register, scale or slicer
- 37 $\frac{3}{4}$ "w x 48 $\frac{1}{2}$ "h

**SN-4CD** 48 $\frac{1}{4}$ " long,  $\frac{1}{2}$  hp  
**SN-6CD** 72 $\frac{1}{4}$ " long,  $\frac{3}{4}$  hp  
**SN-8CD** 96 $\frac{1}{2}$ " long,  $\frac{3}{4}$  hp



CRR3628SS



CH2428SS



*The Signature of Quality*

RSSM-478SC



## Refrigerated Self-Serve High Profile Merchandisers

- Adjustable white metal shelves with price tag moulding
- Black metal front grille and galvanized steel back
- Stainless steel display deck, glass and solid white interior ends, black interior back panel
- Refrigeration control maintains 40°F
- 35 $\frac{1}{4}$ "w x 78"h



## Signature Counter Top Merchandiser

- Combines attractive curved glass styling and merchandising flexibility
- Designed for continuous case lineups
- Removable sliding rear doors, shelf supports and shelves
- 29.7"w

### REFRIGERATED REAR MOUNT

**CRR3628** 36"l x 27.83"h, 2 Shelves  
**CRR4828** 48"l x 27.83"h, 2 Shelves

### REFRIGERATED SELF-SERVE REAR MOUNT

**CRR3628SS** 36"l x 37.7"h, 1 Shelves  
**CRR4828SS** 48"l x 37.7"h, 1 Shelves

### HOT

**CH2428** 23"l x 25.12"h, 2 Shelves  
**CH3628** 35"l x 25.12"h, 2 Shelves  
**CH4828** 47"l x 25.12"h, 2 Shelves

### HOT SELF-SERVE

**CH2428SS** 24"l x 25.1"h, 2 Shelves  
**CH3628SS** 35"l x 25.1"h, 2 Shelves  
**CH4828SS** 47"l x 25.1"h, 2 Shelves

## Convertible Service Over Refrigerated Self-Serve Merchandisers

- Display a variety of products with presentation in mind
- Black interior, mirrored end panels
- Horizontal shielded top light
- Two-tier black display step
- Condensate evaporator provided for a totally self-contained system
- Average case temperature of 33°F to 40°F is maintained
- 34"w x 52"h

**SSRC5052** 50"long,  $\frac{1}{2}$  hp  
**SSRC5952** 59"long,  $\frac{1}{2}$  hp  
**SSRC7752** 77"long,  $\frac{3}{4}$  hp



SSRC3652





## Glass Door Merchandisers

### FEATURES / BENEFITS

- Oversized environmentally friendly (134A) refrigeration - holds 33° to 38°F
- Exterior - durable and permanent non-peel or chip white laminated vinyl (wine merchandiser standard in black vinyl exterior)
- Interior - attractive, NSF approved, white aluminum with 300 series stainless steel floor with convenient clean-out drain (wine merchandiser features black aluminum interior)
- Energy efficient, "Low-E", thermal glass doors
- Foamed-in-place using Ecomate, a high density polyurethane insulation that has zero ozone depletion and zero global warming potential
- Safety shielded fluorescent interior lighting for longer, brighter, shadow-free illumination
- Adjustable, heavy duty, PVC coated wire shelves - 10 mil thick, pure grade vinyl coating. (Wine Merchandisers standard with 4 wine racks and 1 wire shelf per door)
- Positive seal self-closing doors
- Illuminated sign panel included (decal on GDM-10, GDM-10PT, GDM-12)
- Bottom mount compressor
- Self-contained system, no plumbing required
- Available with optional legs or 2½" diameter castors (GDM-10, GDM-10PT & GDM-12 available with optional 2½" diameter castors only)
- Ask your sales representative for the latest color & sign offerings available



GDM-10



GDM-33



GDM-49



GDM-23W-RF

### SWING DOOR UNITS HAVE...

- Integrated door light (IDL) standard on swing door models (excludes GDM-10, GDM-10PT & GDM-12)

### RADIUS FRONT UNITS HAVE...

- Integrated door light (IDL) standard. (excludes GDM-14RF)

### WINE MERCHANDISER UNITS HAVE...

- Standard with mirrored back
- Standard with lock on 23W & 23W-RF



### GLASS DOOR REFRIGERATORS (SWING DOOR)

MODEL	DOORS	SHELVES	HP	L X D† X H
# OF SWING DOOR (STANDARD IN WHITE VINYL)				
GDM-10	1	3	1/6	24 7/8" x 23 1/8" x 53 1/2"
GDM-10PT	1 fr/1 bk	3	1/6	24 7/8" x 25 3/4" x 53 1/2"
GDM-12	1	3	1/6	24 7/8" x 23 1/8" x 62 3/8"
GDM-19T	1	4	1/6	27" x 24 7/8" x 78 5/8"
GDM-23	1	4	1/6	27" x 29 7/8" x 78 5/8"
GDM-26	1	4	1/6	30" x 29 7/8" x 78 5/8"
GDM-35	2	8	1/2	39 1/2" x 29 7/8" x 78 5/8"
GDM-49	2	8	1/2	54 1/8" x 29 7/8" x 78 5/8"
GDM-49RL*	2 fr/2 bk	8	1/2	54 1/8" x 32 1/8" x 78 5/8"
GDM-72	3	12	1/2	78 1/8" x 29 7/8" x 79 3/8"

### WINE MERCHANDISER

#### (STANDARD BLACK VINYL, MIRRORED BACK AND LOCKS)

GDM-23W	1	1 wire/4 wine	1/6	27" x 29 7/8" x 78 5/8"
---------	---	---------------	-----	-------------------------

### GLASS DOOR REFRIGERATORS

#### SLIDE DOOR (STANDARD IN BLACK OR WHITE)

GDM-33	2	8	1/2	39 1/2" x 29 7/8" x 78 5/8"
GDM-37	2	8	3/8	43 1/2" x 29 7/8" x 78 5/8"
GDM-41	2	8	3/8	47 1/8" x 29 7/8" x 78 5/8"
GDM-41SL	2	8	1/6	47 1/8" x 24 1/8" x 78 5/8"
GDM-45	2	8	1/2	51 1/8" x 29 7/8" x 78 5/8"
GDM-47	2	8	1/2	54 1/8" x 29 7/8" x 78 5/8"
GDM-47RL*	2 fr/2 bk	8	1/2	54 1/8" x 32 1/8" x 78 5/8"
GDM-61	2	8	1/2	70 1/8" x 29 7/8" x 78 5/8"
GDM-69	3	12	1/2	78 1/8" x 29 7/8" x 79 3/8"

### GLASS DOOR REFRIGERATORS - RADIUS FRONT

#### SWING DOOR (STANDARD IN WHITE VINYL)

GDM-14RF	2	3	1/6	30 3/8" x 29 1/4" x 58"
GDM-23RF	1	4	1/6	27" x 31 1/4" x 78 5/8"
GDM-23FC-RF	1	2	1/6	27" x 31 1/4" x 78 5/8"
GDM-26RF	1	4	1/6	30" x 31 1/4" x 78 5/8"
GDM-35RF	2	8	1/2	39 1/2" x 32 3/4" x 78 5/8"
GDM-49RF	2	8	1/2	54 1/8" x 34 3/4" x 78 5/8"

### WINE MERCHANDISERS

#### (STANDARD BLACK VINYL AND MIRRORED BACK)

GDM-23W-RF	1	1 wire/4 wine	1/6	27" x 31 1/4" x 78 5/8"
GDM-49W-RF	2	2 wire/8 wine	1/2	54 1/8" x 34 3/4" x 78 5/8"

Black, cherry, and white vinyl exterior available at no extra charge

\* Doors in rear are solid/swing

† Depth does not include 1 1/8" for door handle on Swing Door Models and 3/8" for door handle on Slide Door Models

Note: Wine merchandisers standard with four wire wine racks and one wire shelf per door

# REFRIGERATION Merchandisers

## Glass Door Merchandisers

### FEATURES / BENEFITS

- Exterior, durable and permanent non-peel or chip white laminated vinyl
- Interior - attractive, NSF approved, white aluminum with 300 series stainless steel floor
- Energy efficient, triple pane thermal insulated glass doors
- Foamed-in-place using Ecomate, a high density polyurethane insulation that has zero ozone depletion and zero global warming potential
- Defrost system time initiated, temperature terminated
- Safety shielded fluorescent interior lighting for longer, brighter, shadow-free illumination
- Adjustable, PVC coated wire shelves (not available on Ice Merchandisers)
- Available with optional legs or 2½" diameter castors (legs not available on GDM-10F & GDM-12F; castors not available on GDM-7F. GDM-7F standard with 2½" legs; leg levelers standard for all other models shown)
- Self-contained system, no plumbing required
- See your sales representative for the latest color & sign offerings

### FREEZER UNITS HAVE...

- Oversized environmentally friendly (R404A) refrigeration system, factory sealed and prelubricated for long life
- -10°F temperature (air off evaporator coil, -20°F – an ideal -10°F for storage of frozen food and ice cream)
- Illuminated sign panel included (decals on GDM-7F, GDM-10F & GDM-12F)
- Upright freezer is superior to spot merchandisers

in its high visibility merchandising display

### ICE MERCHANDISERS HAVE...

- Oversized environmentally friendly (134A) refrigeration system, factory sealed and prelubricated for long life
- Holds 20° to 25°F
- GDIM-26NT & GDIM-49NT standard without 12" basin for additional capacity requirements (no extra charge)
- Capacity - GDIM-26 holds 50 eight pound bags; GDIM-26NT holds 54 eight pound bags; GDIM-49NT holds 117 eight pound bags
- Integrated door light (IDL) standard

### DUAL TEMPERATURE UNITS HAVE...

- Oversized environmentally friendly refrigeration systems, factory sealed and prelubricated for long life
- Dual temperature for zoned refrigeration equipped with two, self-contained, independent refrigeration systems
- Left side refrigerator (134A) maintains 33° to 38°F temperatures
- Right side freezer (R404A) maintains -10°F temperatures
- 4" CFC free insulated partition between cabinet sections ensures temperature integrity of each product zone
- Illuminated sign panel included

- Positive seal self-closing doors
- Automatic defrost system

**True**®

### GLASS DOOR FREEZERS

MODEL	SWING DOORS	# OF SHELVES	HP	L X D† X H
<b>FREEZERS (STANDARD IN WHITE VINYL)</b>				
<b>GDM-5F</b>	1	2	½	24" x 23½" x 37½"
<b>GDM-7F</b>	1	3	½	24" x 24¾" x 39¾"
<b>GDM-10F</b>	1	3	⅓	24⅞" x 23⅞" x 53½"
<b>GDM-12F</b>	1	3	⅓	24⅞" x 23⅞" x 62⅞"
<b>GDM-23F</b>	1	4	¾	27" x 29½" x 78¼"
<b>GDM-26F</b>	1	4	¾	30" x 29⅞" x 78⅞"
<b>GDM-35F‡</b>	2	8	1	39½" x 29⅞" x 78⅞"
<b>GDM-43F‡</b>	2	8	1	47⅞" x 29⅞" x 78⅞"
<b>GDM-49F‡</b>	2	8	1½	54" x 29⅞" x 78⅞"
<b>GDM-72F‡</b>	3	12	1½	78¼" x 29⅞" x 79⅞"

### ICE MERCHANDISERS

#### (NO TANK MODELS)

<b>GDIM-26NT</b>	1	1 floor rack	⅓	30" x 29⅞" x 78⅞"
<b>GDIM-49NT</b>	2	2 floor racks	½	54⅞" x 29⅞" x 78⅞"

Black and cherry vinyl exterior available at no extra charge

GDM-12F height does not include 1" for door hinge

‡Requires 115/208-230/60 Hz, single phase, 3 pole, 4 wire circuit

†Depth does not include 1¾" for door handle



GDM-26F



GDM-49F



GDIM-26NT



## Specialty Glass Door Merchandisers

### FEATURES / BENEFITS

- Foamed-in-place using Ecomate, a high density polyurethane insulation that has zero ozone depletion and zero global warming potential
- Energy efficient, "Low-E", thermal glass
- Self-contained system, no plumbing required
- Bottom mount compressor
- Positive seal self-closing doors
- See your sales representative for the latest color & sign offerings

### GLASS END UNITS HAVE...

- Oversized and balanced, environmentally friendly (134A) refrigeration system, factory sealed and prelubricated for long life. Fast pull-down - holds 33° to 38°F
- Exterior - durable and permanent non-peel or chip white laminated vinyl
- Interior - attractive, NSF approved, white aluminum with 300 series stainless steel floor with convenient clean-out drain
- Safety shielded fluorescent interior lighting for longer, brighter, shadow-free illumination

- Adjustable, heavy duty, PVC coated wire shelves - 10 mil thick, pure grade vinyl coating
- Illuminated, 4-color process sign panel included (except on GEM-12 decal standard)

### FOUR SIDED GLASS END UNITS HAVE...

- G4SM: attractive, high luster, copper aluminum finish, combines with black trim and black wire shelves for a sophisticated presentation
- Oversized and balanced, environmentally friendly (134A) refrigeration system, factory sealed and prelubricated for long life. Fast pull-down to maintain middle 30° temperatures
- Exterior - copper aluminum finish offers a fingerprint-free and easy to clean surface
- Interior - attractive, NSF approved, white aluminum with 300 series stainless steel floor with convenient cleanout drain
- Safety shielded fluorescent interior lighting for longer, brighter, shadow-free illumination
- Adjustable, heavy duty, PVC coated wire shelves - 10 mil thick, pure grade black vinyl coating (excluding RGS series)

- Dynamic 360° merchandising display with new attention commanding revolving glass shelves (RGS series)

### FLORAL CASE UNITS HAVE...

- Oversized environmentally friendly (134A) refrigeration system has been designed to hold 35°F
- Exterior durable and permanent non-peel or chip black laminated vinyl (white and rosewood vinyl available at no extra charge), G4SM model standard in copper aluminum finish
- Interior - attractive NSF approved, black vinyl coated aluminum for vivid contrast and dramatic display of flowers, Non peel or chip interior - will last a lifetime, 300 series stainless steel floor
- Baffled airflow - blossom supporting, correct temperature and humidity for longer shelf life of fresh flowers
- Interior Agro lighting designed for flowers to prevent browning
- Illuminated sign panel (decal on 12FC models)
- Mirrored interior backs available
- Adjustable, heavy duty, black PVC coated wire shelves

### GLASS END MERCHANDISERS

MODEL	DOORS	# OF SHELVES	HP	L X D† X H
(STANDARD IN WHITE VINYL)				
GEM-12	1 swing	3	1/5	24 7/8" x 23 1/8" x 62 3/8"
GEM-23	1 swing	4	1/5	27" x 29 7/8" x 78 5/8"
GEM-47	2 slide	8	1/2	54 1/8" x 29 7/8" x 78 5/8"
GEM-69	3 slide	12	1/2	78 1/8" x 29 7/8" x 79 3/4"
GEM-72	3 swing	12	1/2	78 1/8" x 29 7/8" x 79 3/4"

Cherry and black vinyl exterior available at no extra charge (not available in stainless steel), (copper aluminum available for GEM-23 at no extra charge)

† Depth does not include 1 1/4" for door handle on swing door models or 3/4" for door handle on slide door models

### FOUR SIDED GLASS END MERCHANDISERS

#### (STANDARD IN COPPER-ALUMINUM)

#### THE MARKET'S PREMIER DESSERT CASE

G4SM-23	1 swing	4	1/2	27 1/2" x 30 1/8" x 78 5/8"
G4SM-23RL	1 fr/1 bk	4	1/2	27 1/2" x 32 1/8" x 78 5/8"
G4SM-23RL-SI	1 fr/1 bk	4	1/2	27 1/2" x 32 3/4" x 78 5/8"
G4SM-23-PT	1 fr/1 bk	4	1/2	27 1/2" x 32 3/4" x 78 5/8"

(STANDARD IN COPPER-ALUMINUM)

#### ROTATING GLASS SHELF

G4SM-23-RGS	1 swing	6	1/2	27 1/2" x 30 1/8" x 78 5/8"
-------------	---------	---	-----	-----------------------------

Cherry, black and white vinyl exterior available at no extra charge (not available in stainless steel)

† Depth does not include 1 1/4" for door handles (rear load and pass thru's have handles front and back)

Note: G4SM-23RGS has 5 glass shelves and 1 mirrored shelf (positioned on bottom)

### FLORAL CASES

#### (STANDARD IN BLACK VINYL-EXTERIOR AND INTERIOR)

#### FLORAL CASES

GDM-12FC	1 swing	3	1/5	24 7/8" x 23 1/8" x 62 3/8"
GDM-23FC	1 swing	2	1/5	27" x 29 7/8" x 78 5/8"
GDM-23FC-RF	1 swing	2	1/5	27" x 31 1/4" x 78 5/8"
GDM-47FC	2 slide	4	1/2	54 1/8" x 29 7/8" x 78 5/8"
GDM-49FC	2 swing	4	1/2	54 1/8" x 29 7/8" x 78 5/8"
GDM-61FC	2 slide	4	1/2	70 1/8" x 29 7/8" x 78 5/8"
GDM-69FC	3 slide	6	1/2	78 1/8" x 29 7/8" x 79 3/4"
GDM-72FC	3 swing	6	1/2	78 1/8" x 29 7/8" x 79 3/4"

### GLASS END FLORAL CASES

GEM-12FC	1 swing	2	1/5	24 7/8" x 23" x 62 1/2"
GEM-23FC	1 swing	2	1/5	27" x 29 7/8" x 78 5/8"
G4SM-23FC	1 swing	2	1/2	27 1/2" x 30 1/8" x 78 5/8"
GEM-69FC	3 slide	6	1/2	78 1/8" x 29 7/8" x 79 3/4"
GEM-72FC	3 swing	6	1/2	78 1/8" x 29 7/8" x 79 3/4"

White and cherry vinyl exteriors available at no extra charge

† Depth does not include 1 1/4" for handle on swing door models (excludes -RF model); or 3/4" for slide door models

**True®**

GEM-23FC



GEM-47



G4SM-23RL



## Specialty Glass Door Merchandisers

### FEATURES / BENEFITS

- Oversized environmentally friendly (134A) refrigeration - hold 33° to 38°F
- Interior - attractive, NSF approved, white aluminum with 300 series stainless steel floor
- Energy efficient, "Low-E", thermal glass doors
- Foamed-in-place using Ecomate, a high density polyurethane insulation that has zero ozone depletion and zero global warming potential
- Adjustable, heavy duty, PVC coated wire shelves - 10 mil thick, pure grade vinyl coating
- Self-contained system, no plumbing required
- Positive seal self-closing doors.
- Energy efficient
- See your sales representative for the latest color & sign offerings

### CONVENIENCE STORE UNITS HAVE...

- Lower profile on convenience store coolers allows extra visibility throughout store - makes gondola and center store placement possible
- Exterior - durable and permanent non-peel or chip white laminated vinyl
- Safety shielded fluorescent interior lighting
- Decal included ("True Stripe" illuminated sign panel on GDM-41SL standard).
- Available with optional legs or 2½" diameter castors (legs and castors not available for GDM-10, GDM-10PT)

### COUNTER-TOP UNITS HAVE...

- Exterior - non-peel or chip white laminated vinyl, durable and permanent; or gleaming stainless steel on the food service models
- Designed for convenient access, fast service and attractive display
- Illuminated sign panel - "True Stripe" standard (decal on GDM-7/-7-S)
- GDM-7 and GDM-7-S are standard with 2½" legs; leg levelers standard for all other models shown

**True®**

GDM-10



GDM-9

GDM-5



### CONVENIENCE STORE COOLERS

MODEL	DOORS	# OF SHELVES	HP	L X D† X H
<b>(LOWER HEIGHT &amp; NARROW DEPTH)</b>				
<b>STANDARD IN WHITE VINYL</b>				
GDM-33SSL-54	2 slide	3	1/3	36" x 18" x 54½"
GDM-41SL-54	2 slide	6	1/3	47½" x 21" x 54½"
GDM-41SL-60	2 slide	6	1/3	47½" x 21" x 59½"
<b>(LOWER HEIGHT, NARROW DEPTH, FAST LANE, PASS-THRU)</b>				
<b>STANDARD IN WHITE VINYL</b>				
GDM-33C-PT	2 fr/2 bk	3	1/2	39½" x 24½" x 59½"
GDM-33C-PT-54	2 fr/2 bk	3	1/3	39½" x 24½" x 54½"
<b>(LOWER HEIGHT - END OF AISLE MERCHANDISERS)</b>				
<b>STANDARD IN WHITE VINYL</b>				
GDM-10	1 swing	3	1/3	24½" x 23½" x 53½"
GDM-10PT	1 fr/1 bk	3	1/3	24½" x 25¼" x 53½"

Cherry vinyl exterior available at no extra charge but a lead time will apply(GDM's only)

TCM's also available in white vinyl with black trim

† Depth does not include 1½" for handle on swing door models (GDM-10PT has handles front and back); or ¾" on slide door models (1½" on slide door pass-thru models)

### COUNTERTOP COOLERS

MODEL	DOORS	# OF SHELVES	HP	L X D† X H
<b>WHITE VINYL EXTERIOR</b>				
GDM-5	1	2	1/6	24" x 23½" x 37"
GDM-5-PT*	1 fr/1 bk	2	1/6	24" x 23½" x 37"
GDM-7*	1	3	1/6	24" x 24¾" x 39¾"
GDM-9	2 slide	3	1/6	36½" x 22½" x 39½"
<b>STAINLESS STEEL EXTERIOR</b>				
GDM-5-S	1	2	1/6	24" x 23½" x 37"
GDM-5-PT-S	1 fr/1 bk	2	1/6	24" x 23½" x 37"
GDM-7-S	1	3	1/6	24" x 24¾" x 39¾"
GDM-9-S	2 slide	3	1/6	36½" x 22½" x 39½"

Black vinyl exterior available at no extra charge

\* Freezer model available

† Depth does not include 1½" for handle on swing door models (GDM-5PT, -PT-S have handles front and back); or ¾" on slide door models

# Pass-Thrus REFRIGERATION

## TR Series Pass-Thrus

### FEATURES / BENEFITS

- Shelving - 1 interior kit option included per full section at no charge. 4 different interior kits available
- Pilasters and tray slides /shelving are factory installed at no charge
- Exterior - 300 series stainless steel front, sides, bottom and back (the finest stainless available)
- Interior - 300 series stainless steel walls, back, floor & door liner (solid doors)
- Foamed-in-place using Ecomate, a high density polyurethane insulation that has zero ozone depletion and zero global warming potential
- Lifetime guaranteed recessed door handles standard
- Positive seal self-closing doors with 120 degree stay open feature. Lifetime guaranteed door hinges
- Incandescent interior lighting (solid doors); Fluorescent interior lighting (glass and combination doors)
- Door locks standard
- 4" diameter swivel castors standard equipment, 6" legs available, (Heated cabinets standard with legs, optional castors available on single section cabinets only)
- Self-contained system

### REFRIGERATION UNITS HAVE...

- Oversized and balanced, environmentally friendly (134A), refrigeration system, factory sealed and pre-lubricated for long life - holds 33° to 38°F
- The utility of the "TR" series pass-thru is in its ability to be a server station for cold dishes. Designed to become a central station, rear-loaded from the kitchen prep area to be front-accessed by servers
- Hot gas condensate for energy efficiency

### HEATED UNITS HAVE...

- Powerfully provides holding temperatures of 80° to 180°F throughout the cabinet for uniform, forced-air, heating
- Heater - stainless steel for corrosion resistance
- Exterior mounted, color coded, temperature monitor
- Humidity control - 12" x 20" pan standard
- Manual humidity control is a standard feature (turn counterclockwise to ventilate)
- Pass-thru heated cabinet designed to be rear-loaded from prep area and front accessed



### PASS-THRU REFRIGERATORS - TR SERIES

MODEL	DOORS	HP	L X D† X H*
<b>SOLID FRONT/SOLID REAR DOORS</b>			
TR1RPT-1S-1S	2	1/2	29" x 37 1/4" x 78 1/4"
TR2RPT-2S-2S	4	3/4	51 1/2" x 37 1/4" x 78 1/4"
<b>SOLID FRONT HALF DOORS/SOLID REAR DOORS</b>			
TR1RPT-2HS-1S	3	1/2	29" x 37 1/4" x 78 1/4"
TR2RPT-4HS-2S	6	3/4	51 1/2" x 37 1/4" x 78 1/4"
<b>GLASS FRONT/SOLID REAR DOORS</b>			
TR1RPT-1G-1S	2	1/2	29" x 37 1/2" x 78 1/4"
TR2RPT-2G-2S	4	3/4	51 1/2" x 37 1/2" x 78 1/4"
<b>GLASS FRONT HALF DOORS/SOLID REAR DOORS</b>			
TR1RPT-2HG-1S	3	1/2	29" x 37 1/2" x 78 1/4"
TR2RPT-4HG-2S	6	3/4	51 1/2" x 37 1/4" x 78 1/4"
<b>COMBO FRONT HALF DOORS/SOLID REAR DOORS</b>			
TR1RPT-1HG/1HS-1S	3	1/2	29" x 37 1/2" x 78 1/4"
TR2RPT-2HG/2HS-2S	6	3/4	51 1/2" x 37 1/2" x 78 1/4"
<b>SOLID FRONT/GLASS REAR DOORS</b>			
TR1RPT-1S-1G	2	1/2	29" x 37 1/2" x 78 1/4"
TR2RPT-2S-2G	4	3/4	51 1/2" x 37 1/4" x 78 1/4"
<b>SOLID FRONT HALF DOORS/GLASS REAR DOORS</b>			
TR1RPT-2HS-1G	3	1/2	29" x 37 1/2" x 78 1/4"
TR2RPT-4HS-2G	6	3/4	51 1/2" x 37 1/4" x 78 1/4"
<b>GLASS FRONT/GLASS REAR DOORS</b>			
TR1RPT-1G-1G	2	1/2	29" x 37 1/2" x 78 1/4"
TR2RPT-2G-2G	4	3/4	51 1/2" x 37 1/4" x 78 1/4"
<b>GLASS FRONT HALF DOORS/GLASS REAR DOORS</b>			
TR1RPT-2HG-1G	3	1/2	29" x 37 1/4" x 78 1/4"
TR2RPT-4HG-2G	6	3/4	51 1/2" x 37 1/4" x 78 1/4"
<b>COMBO FRONT HALF DOOR/GLASS REAR DOORS</b>			
TR1RPT-1HG/1HS-1G	3	1/2	29" x 37 1/2" x 78 1/4"
TR2RPT-2HG/2HS-2G	6	3/4	51 1/2" x 37 1/2" x 78 1/4"

\* Height does not include 5" for castor height or 6" for optional legs or 1" for system mechanical components

† Depth does not include 1 1/2" for door handles (glass door models only)

Models with glass front & rear doors will be 2 1/4"

### PASS-THRU HEATED CABINET - TR SERIES

MODEL	DOORS	WATT	L X D X H*
<b>SOLID DOORS</b>			
TR1HPT-1S-1S†	2	2000	29" x 37 1/4" x 78 1/4"
TR2HPT-2S-2S†	4	4000	51 1/2" x 37 1/4" x 78 1/4"

\* Height does not include 6" for legs or 5" for optional castors (castors available on single section models only) and 1" for system mechanical components

† Requires 115/208-240/60 Hz, single phase, 3 pole, 4 wire circuit

Note: TR2HPT-2S-2S requires hard wiring



TR1RPT-1S-1S



TR2RPT-4HG-2S

## TG Series Pass-Thrus

### FEATURES / BENEFITS

- Oversized and balanced, environmentally friendly, refrigeration system, factory sealed and pre-lubricated for long life
- Food safe refrigerators hold 33° to 38°F
- 300 series stainless steel front
- Anodized quality aluminum sides, back and bottom
- Refrigeration units interior have - attractive, NSF approved, white aluminum sides and back, 300 series stainless floor and door liner (solid doors). Heated units have Anodized aluminum interior
- Shelving - 3 heavy duty, PVC wire shelves per section (heated cabinets are standard with chrome shelves)
- The utility of the "TG" series pass-thru is in its ability to be a server station for cold dishes. Designed to become a central station, rear-loaded from the kitchen prep area to be front-accessed by servers
- Foamed-in-place using Ecomate, a high density polyurethane insulation that has zero ozone depletion and zero global warming potential
- Refrigeration units have exterior mounted digital thermometer. Heated units have exterior mounted, color coded, temperature monitor
- Positive seal self-closing doors with 120° stay open feature. Lifetime guaranteed door hinges
- Incandescent interior lighting (solid door) Fluorescent interior lighting (glass door)
- Door locks standard
- 4" diameter swivel castors standard equipment. 6" legs available
- Hot gas condensate for energy efficiency on refrigerators
- Self-contained system



### HEATED UNITS HAVE...

- Powerfully provides holding temperatures of 80° to 180°F throughout the cabinet for uniform, forced-air, heating
- Heater - stainless steel for corrosion resistance
- Humidity control - 12" x 20" pan standard



TG1RPT-1S-1S



TG2RPT-2S-2S

### PASS-THRU REFRIGERATORS - TG SERIES

MODEL	DOORS	HP	L X D† X H*
<b>SOLID DOORS</b>			
TG1RPT-1S-1S	2	1/2	29" x 37 1/4" x 78 1/4"
TG2RPT-2S-2S	4	3/4	51 1/8" x 37 1/4" x 78 1/4"
<b>HALF-DOOR SOLID FRONT DOORS</b>			
TG1RPT-2HS-1S	3	1/2	29" x 37 1/2" x 78 1/4"
TG2RPT-4HS-2S	6	3/4	51 1/8" x 37 1/4" x 78 1/4"
<b>GLASS FRONT/SOLID REAR DOORS</b>			
TG1RPT-1G-1S	2	1/2	29" x 37 1/2" x 78 1/4"
TG2RPT-2G-2S	4	3/4	51 1/8" x 37 1/4" x 78 1/4"
<b>HALF-DOOR GLASS FRONT/SOLID REAR DOORS</b>			
TG1RPT-2HG-1S	3	1/2	29" x 37 1/2" x 78 1/4"
TG2RPT-4HG-2S	6	3/4	51 1/8" x 37 1/4" x 78 1/4"
<b>HALF-DOOR COMBO FRONT/SOLID REAR DOORS</b>			
TG1RPT-1HG/1HS-1S	3	1/2	29" x 37 1/2" x 78 1/4"
TG2RPT-2HG/2HS-2S	6	3/4	51 1/8" x 37 1/4" x 78 1/4"
<b>SOLID FRONT/GLASS REAR DOORS</b>			
TG1RPT-1S-1G	2	1/2	29" x 37 1/2" x 78 1/4"
TG2RPT-2S-2G	4	3/4	51 1/8" x 37 1/4" x 78 1/4"
<b>HALF-DOOR SOLID FRONT/GLASS REAR DOORS</b>			
TG1RPT-2HS-1G	3	1/2	29" x 37 1/2" x 78 1/4"
TG2RPT-4HS-2G	6	3/4	51 1/8" x 37 1/4" x 78 1/4"
<b>GLASS FRONT DOOR/GLASS REAR DOORS</b>			
TG1RPT-1G-1G	2	1/2	29" x 37 1/2" x 78 1/4"
TG2RPT-2G-2G	4	3/4	51 1/8" x 37 1/4" x 78 1/4"
<b>HALF-DOOR GLASS FRONT/GLASS REAR DOORS</b>			
TG1RPT-2HG-1G	3	1/2	29" x 37 1/2" x 78 1/4"
TG2RPT-4HG-2G	6	3/4	51 1/8" x 37 1/4" x 78 1/4"
<b>HALF-DOOR COMBO FRONT/GLASS REAR DOORS</b>			
TG1RPT-1HG/1HS-1G	3	1/2	29" x 37 1/2" x 78 1/4"
TG2RPT-2HG/2HS-2G	6	3/4	51 1/8" x 37 1/4" x 78 1/4"

\* Height does not include 5" for castor height or 6" for optional legs or 1" for system mechanical components

† Depth does not include 1 3/8" for door handles (glass door models only)

Note: Models with glass front & rear doors will be 2 1/4"

### PASS-THRU HEATED CABINET - TG SERIES

MODEL	DOORS	WATTS	L X D X H*
<b>SOLID DOORS</b>			
TG1HPT-1S-1S†	2	2000	29" x 37 1/4" x 78 1/4"
TG2HPT-2S-2S†	4	4000	51 1/8" x 37 1/4" x 78 1/4"

\* Height does not include 6 1/4" for legs and 1" for system mechanical components

† Requires 115/208-240/60 Hz, single phase, 3 pole, 4 wire circuit

Note: TG2HPT-2S-2S requires hard wiring



# Roll-Ins, Roll-Thrus REFRIGERATION

## TR Series Roll-Ins & Roll-Thrus

### FEATURES / BENEFITS

- Accepts roll-in rack (inboard castor) with maximum dimensions of 27"w x 29"d x 66"h. 89" high models accept roll-in/thru rack (inboard castor) with maximum dimensions of 27"w x 29"d x 72"h (supplied by others)
- Exterior - 300 series stainless steel front, bottom and back, stainless steel sides
- Interior - 300 series stainless steel walls, back, floor & door liner
- Heavy gauge doors
- Three rugged cam-lift hinges per door- lifetime guaranteed. Designed for easy product access with a full 180° open capability and stay open feature at 120°
- Heavy gauge stainless steel ramp standard for each door
- Interior bumpers protect cabinet
- Foamed-in-place using Ecomate, a high density polyurethane insulation that has zero ozone depletion and zero global warming potential
- Incandescent interior lighting
- Lifetime guaranteed recessed door handles
- Self-contained system
- Field reversible door swing

### REFRIGERATION UNITS HAVE...

- Oversized and balanced, environmentally friendly (134A), refrigeration system, factory sealed and pre-lubricated for long life - holds 33° to 38°F
- Hot gas condensate for energy efficiency
- Exterior mounted digital electronic thermometer
- Energy saver switch
- Remote units available

### FREEZER UNIT HAS...

- Oversized and balanced, environmentally friendly, refrigeration system, factory sealed and pre-lubricated for long life - holds -10°F (air off evaporator coil, -20°F)
- Ideal for roll-in racks supporting frozen food and ice cream
- Automatic defrost system time-initiated, temperature-terminated
- Exterior mounted digital electronic thermometer features manual defogger
- Automatic evaporator fan motor delay during defrost cycle
- Energy saver switch

### HEATED UNITS HAVE...

- Powerfully provides holding temperatures of 80° to 180°F throughout the cabinet for uniform, forced-air, heating
- Heater - stainless steel for corrosion resistance
- Humidity control - 12" x 20" pan standard
- Exterior mounted, color coded, temperature monitor
- Roll-thru heated cabinet designed to be rear-loaded from prep area and front accessed

**True®**

### ROLL-IN REFRIGERATORS

MODEL	DOORS	HP	L X D X H*
TR1RRI-1S	1	1/3	35" x 34 1/2" x 83 3/4"
TR2RRI-2S	2	1/2	68" x 34 1/2" x 83 3/4"
<b>89" HIGH</b>			
TR1RRI89-1S	1	1/3	35" x 34 1/2" x 89"
TR2RRI89-2S	2	1/2	68" x 34 1/2" x 88 3/4"

### ROLL-IN FREEZER

TR1FRI-1S	1	3/4	35" x 34 1/2" x 83 3/4"
-----------	---	-----	-------------------------

### ROLL-THRU REFRIGERATORS

TR1RRT-1S-1S	2	1/3	35" x 36 7/8" x 83 3/4"
TR2RRT-2S-2S	4	1/2	68" x 36 7/8" x 83 3/4"
<b>89" HIGH</b>			
TR1RRT89-1S-1S	2	1/3	35" x 36 7/8" x 88 3/4"
TR2RRT89-2S-2S	4	1/2	68" x 36 7/8" x 88 3/4"

### ROLL-IN HEATED CABINETS

MODEL	DOORS	WATTS	L X D X H
TR1HRI-1S ‡	1	2000	35" x 34 1/2" x 83 3/4"
TR2HRI-2S ‡	2	4000	68" x 34 1/2" x 83 3/4"
<b>89" HIGH</b>			
TR1HRI89-1S ‡	1	2000	35" x 34 1/2" x 88 3/4"

### ROLL-THRU HEATED CABINETS

TR1HRT-1S-1S ‡	2	2000	35" x 36 7/8" x 83 3/4"
TR2HRT-2S-2S ‡	4	4000	68" x 36 7/8" x 83 3/4"
<b>89" HIGH</b>			
TR1HRT89-1S-1S ‡	2	2000	35" x 36 7/8" x 88 3/4"

\* Height does not include 1" for system mechanical components

‡ Requires 115/208-240/60 Hz, single phase, 3 pole, 4 wire circuit

Note: TR2HRI-2S, TR2HRT-2S-2S require hard wiring



TR1RRT-1S-1S



TR1FRI-1S



TR2RRI-2S

## TG Series Roll-Ins & Roll-Thrus

### FEATURES / BENEFITS

- Accepts roll-in rack (inboard castor) with maximum dimensions of 27" w x 29" d x 66" h TG1RRI89-1S, TG2RRI89-2S, TG1RRT89-1S-1S, TG2RRT89-2S-2S, TG1HRI89-1S and TG1HRT89-1S-1S accept roll-in rack (inboard castor) with maximum dimensions of 27" w x 29" d x 72" h (supplied by others)
- 300 series stainless steel, front
  - Anodized quality aluminum sides, back, and bottom
- Interior - attractive, NSF approved, white aluminum sides and back. 300 series stainless floor and door liner except the heated units which have anodized aluminum interior
- Three rugged cam-lift hinges per door - lifetime guaranteed. Designed for easy product access with a full 180° open capability and stay open feature at 120°
- Heavy gauge stainless steel ramp standard for each door
- Exterior mounted digital electronic thermometer. Heated units have exterior mounted, color coded, temperature display.
- Foamed-in-place using Ecomate, a high density polyurethane insulation that has zero ozone depletion and zero global warming potential
- Incandescent interior lighting
- Lifetime guaranteed recessed door handles
- Self-contained system

### REFRIGERATION UNITS HAVE...

- Oversized and balanced, environmentally friendly, refrigeration system, factory sealed and pre-lubricated for long life - hold 33° to 38°F
- Heavy gauge doors
- Hot gas condensate for energy efficiency
- Energy saver switch

### FREEZER UNITS HAVE...

- Oversized and balanced, environmentally friendly, refrigeration system, factory sealed and pre-lubricated for long life
- Freezer holds -10°F (air off evaporator coil, -20°F) for the best in food preservation
- An ideal -10°F for roll-in racks supporting frozen food and ice cream
- Automatic defrost system time-initiated, temperature-terminated
- Automatic evaporator fan motor delay during defrost cycle
- Energy saver switch

### HEATED UNITS HAVE...

- Powerfully provides holding temperatures of 80° to 180°F throughout the cabinet for uniform, forced-air, heating
- Heater - stainless steel for corrosion resistance
- Humidity control - 12" x 20" pan standard
- Roll-thru heated cabinet designed to be rear-loaded from prep area and front accessed
- Heavy gauge doors



#### ROLL-IN REFRIGERATORS

MODEL	DOORS	HP	L X D X H*
TG1RRI-1S	1	1/3	35" x 34 1/2" x 83 3/4"
TG2RRI-2S	2	1/2	68" x 34 3/4" x 83 3/4"
<b>89" HIGH</b>			
TG1RRI89-1S	1	1/3	35" x 34 1/2" x 89"
TG2RRI89-2S	2	1/2	68" x 34 1/2" x 88 3/4"

#### ROLL-THRU REFRIGERATORS

TG1RRT-1S-1S	2	1/3	35" x 36 7/8" x 83 3/4"
TG2RRT-2S-2S	4	1/2	68" x 36 7/8" x 83 3/4"
<b>89" HIGH</b>			
TG1RRT89-1S-1S	2	1/3	35" x 36 7/8" x 89"
TG2RRT89-2S-2S	4	1/2	68" x 36 7/8" x 89"

#### ROLL-IN FREEZER

TG1FRI-1S	1	3/4	35" x 34 1/2" x 83 3/4"
-----------	---	-----	-------------------------

#### ROLL-IN HEATED CABINETS

MODEL	DOORS	WATTS	L X D X H*
TG1HRI-1S ‡	1	2000	35" x 34 1/2" x 83 3/4"
TG2HRI-2S ‡	2	4000	68" x 34 1/2" x 83 3/4"
<b>89" HIGH</b>			
TG1HRI89-1S ‡	1	2000	35" x 34 1/2" x 88 3/4"

#### ROLL-THRU HEATED CABINETS

TG1HRT-1S-1S ‡	2	2000	35" x 36 7/8" x 83 3/4"
TG2HRT-2S-2S ‡	4	4000	68" x 36 7/8" x 83 3/4"
<b>89" HIGH</b>			
TG1HRT89-1S-1S ‡	2	2000	35" x 36 7/8" x 88 3/4"

\* Height does not include 1" for system mechanical components

‡ Requires 115/208-240/60 Hz, single phase, 3 pole, 4 wire circuit

Note: TG2HRI-2S and TG2HRT-2S-2S requires hard wiring



TG1FRI-1S



TG1RRT89-1S-1S



TG2RRT-2S-2S

## TA Series Pass-Thrus, Roll-Ins & Roll-Thrus

### FEATURES / BENEFITS

- Oversized and balanced, environmentally friendly refrigeration system, factory sealed and pre-lubricated for long life
  - Exterior - 300 series stainless steel doors, front, bottom and back and stainless steel sides
  - Interior - attractive, NSF approved, white aluminum sides and back, 300 series stainless floor and door liner (solid doors)
  - Exterior mounted digital electronic thermometer
  - Foamed-in-place using Ecomate, a high density polyurethane insulation that has zero ozone depletion and zero global warming potential
  - Lifetime guaranteed recessed door handles on solid door models
  - Incandescent interior lighting (solid door). Fluorescent interior lighting (glass and combo doors)
  - Top mounted unit positioned out of food zone to maximize storage capacity
  - Self-contained system (Remote units available)
- ### PASS-THRU UNITS HAVE...
- Shelving - (3) heavy duty, PVC wire shelves per section (shipped separately) (4) different interior kits available
  - Food safe refrigerators hold 33° to 38°F
  - The utility of the "TA" series pass-thru is in its ability to be a server station for cold dishes. Designed to become a central station, rear-loaded from the kitchen prep area to be front-accessed by servers
  - Door locks standard
  - 4" diameter swivel castors standard equipment, 6" legs available

- Positive seal self-closing doors with 120° stay open feature, Lifetime guaranteed door hinges

### ROLL-IN & ROLL-THRU UNITS HAVE...

- Accepts roll-in rack (inboard castor) with maximum dimensions of 27" w x 29" d x 66" h, 89" high models accept roll-in/thru rack (inboard castor) with maximum dimensions of 27" w x 29" d x 72" h (supplied by others)
- Heavy gauge doors
- Three rugged cam-lift hinges per door-lifetime guaranteed. Designed for easy product access with a full 180° open capability and stay open feature at 120°
- Interior bumpers protect cabinet
- Glass condensate pan to prevent electrolysis
- Reversible wiper gaskets for positive seal

### REFRIGERATION UNITS HAVE...

- Food safe refrigerators hold 33° to 38°F
- Hot gas condensate for energy efficiency

### FREEZER UNITS HAVE....

- Freezer holds -10°F (air off evaporator coil, -20°F) for the best in food preservation
- An ideal -10°F for roll-in racks supporting frozen food and ice cream
- Automatic defrost system time-initiated, temperature-terminated
- Automatic evaporator fan motor delay during defrost cycle
- Minimum wattage heater in cabinet frame
- Standard backguard improves airflow

### HEATED UNITS HAVE...

- Powerfully provides holding temperatures of 80° to 180°F throughout the cabinet for uniform, forced-air, heating
- Heater - stainless steel for corrosion resistance
- Humidity control
- Exterior mounted, color coded, temperature monitor
- Roll-thru heated cabinet designed to be rear-loaded from prep area and front accessed



TA1RPT-1HG/1HS-1S

### PASS-THRU REFRIGERATORS

MODEL	DOORS	HP	L X D X H*
<b>SOLID FRONT/SOLID REAR DOORS</b>			
TA1RPT-1S-1S	2	1/2	29" x 37 1/4" x 78 1/4"
TA2RPT-2S-2S	4	3/4	51 1/2" x 37 1/4" x 78 1/4"
<b>SOLID FRONT HALF DOOR/SOLID REAR DOORS</b>			
TA1RPT-2HS-1S	3	1/2	29" x 37 1/4" x 78 1/4"
TA2RPT-4HS-2S	6	3/4	51 1/2" x 37 1/4" x 78 1/4"
<b>GLASS FRONT/SOLID REAR DOORS</b>			
TA1RPT-1G-1S	2	1/2	29" x 37 1/2" x 78 1/4"
TA2RPT-2G-2S	4	3/4	51 1/2" x 37 1/4" x 78 1/4"
<b>GLASS FRONT HALF DOORS/SOLID REAR DOORS</b>			
TA1RPT-2HG-1S	3	1/2	29" x 37 1/4" x 78 1/4"
TA2RPT-4HG-2S	6	3/4	51 1/2" x 37 1/4" x 78 1/4"
<b>COMBO FRONT HALF DOORS/SOLID REAR DOORS</b>			
TA1RPT-1HG/1HS-1S	3	1/2	29" x 37 1/2" x 78 1/4"
TA2RPT-2HG/2HS-2S	6	3/4	51 1/2" x 37 1/4" x 78 1/4"
<b>SOLID FRONT/GLASS REAR DOORS</b>			
TA1RPT-1S-1G	2	1/2	29" x 37 1/4" x 78 1/4"
TA2RPT-2S-2G	4	3/4	51 1/2" x 37 1/4" x 78 1/4"
<b>SOLID FRONT HALF DOORS/GLASS REAR DOORS</b>			
TA1RPT-2HS-1G	3	1/2	29" x 37 1/4" x 78 1/4"
TA2RPT-4HS-2G	6	3/4	51 1/2" x 37 1/4" x 78 1/4"
<b>GLASS FRONT/GLASS REAR DOORS</b>			
TA1RPT-1G-1G	2	1/2	29" x 37 1/2" x 78 1/4"
TA2RPT-2G-2G	4	3/4	51 1/2" x 37 1/4" x 78 1/4"
<b>GLASS FRONT HALF DOORS/GLASS REAR DOORS</b>			
TA1RPT-2HG-1G	3	1/2	29" x 37 1/4" x 78 1/4"
TA2RPT-4HG-2G	6	3/4	51 1/2" x 37 1/4" x 78 1/4"
<b>COMBO FRONT HALF DOOR/GLASS REAR DOORS</b>			
TA1RPT-1HG/1HS-1G	3	1/2	29" x 37 1/2" x 78 1/4"
TA2RPT-2HG/2HS-2G	6	3/4	51 1/2" x 37 1/4" x 78 1/4"

\* Height does not include 5" for castor height or 6" for optional legs and 1" for system mechanical components

† Depth does not include 1 1/4" for door handles front and rear (glass door models only)

**True**®

### ROLL-IN REFRIGERATORS

MODEL	DOORS	HP	L X D X H*
TA1RRI-1S	1	1/3	35" x 34 1/2" x 83 3/4"
TA2RRI-2S	2	1/2	68" x 34 1/2" x 83 3/4"
<b>89" HIGH</b>			
TA1RRI89-1S	1	1/3	35" x 34 1/2" x 89"
TA2RRI89-2S	2	1/2	68" x 34 1/2" x 89"

### ROLL-THRU REFRIGERATORS

MODEL	DOORS	HP	L X D X H*
TA1RRT-1S-1S	2	1/3	35" x 36 7/8" x 83 3/4"
TA2RRT-2S-2S	4	1/2	68" x 36 7/8" x 83 3/4"
<b>89" HIGH</b>			
TA1RRT89-1S-1S	2	1/3	35" x 36 7/8" x 89"
TA2RRT89-2S-2S	4	1/2	68" x 36 7/8" x 89"

### ROLL-IN FREEZER

MODEL	DOORS	HP	L X D X H*
TA1FRI-1S	1	3/4	35" x 34 1/2" x 83 3/4"

### ROLL-IN HEATED CABINETS

MODEL	DOORS	WATTS	L X D X H
TA1HRI-1S ‡	1	2000	35" x 34 1/2" x 83 3/4"
TA2HRI-2S ‡	2	4000	68" x 34 1/2" x 83 3/4"
<b>89" HIGH</b>			
TA1HRI89-1S ‡	1	2000	35" x 34 1/2" x 89"

### ROLL-THRU HEATED CABINETS

MODEL	DOORS	WATTS	L X D X H
TA1HRT-1S-1S ‡	2	2000	35" x 36 7/8" x 83 3/4"
TA2HRT-2S-2S ‡	4	4000	68" x 36 7/8" x 83 3/4"
<b>89" HIGH</b>			
TA1HRT89-1S-1S ‡	2	2000	35" x 36 7/8" x 89"

\* Height does not include 1" for system mechanical components

‡ Requires 115/208-240/60 Hz, single phase, 3 pole, 4 wire circuit

Note: TA2HRI-2S, TA2HRT-2S-2S require hard wiring



# REFRIGERATION Freezers, Air Curtains

## Horizontal Freezers

### FEATURES / BENEFITS

- Designed to promote high-profit frozen novelties in high impulse retail traffic areas – ideal for bolstering incremental sales increases for frozen merchandise and seasonal specialties
- Oversized environmentally friendly (134A) refrigeration - holds -10°F, the ideal temperature for frozen foods and ice cream
- Exterior - non-peel or chip white laminated vinyl with silver trim, durable and permanent, also available in black vinyl exterior
- Interior - attractive, NSF approved, white aluminum with 300 series stainless steel floor
- Tempered, hard coated, "Low-E" glassslide lid. Reduces solar heat gain, enhances energy efficiency and minimizes condensation
- Designed for convenient access, fast service and attractive display
- Optional, heavy duty, PVC coated wire baskets available (THF-29FL holds 2 baskets, THF-41FL/AL holds 3 baskets, THF-51FL holds 4 baskets)
- Locks standard, provides security, prevents theft
- Interior mounted temperature monitor
- Foamed-in-place polyurethane high density cell insulation (CFC free)
- Convenient defrost drain
- 2½" dual swivel castors standard
- Self-contained system, no plumbing required
- See your sales representative for the latest color offerings
- Manual defrost system



TFM-29FL

TFM-41FL

### GLASS LID HORIZONTAL SPOT FREEZERS

MODEL	HP	L X D X H*
-------	----	------------

### FLAT LID HORIZONTAL FREEZERS

TFM-29FL	¼	29½" x 25¾" x 31¾"
----------	---	--------------------

TFM-41FL	⅓	41" x 25¾" x 31¾"
----------	---	-------------------

TFM-51FL	⅓	51½" x 25¾" x 31¾"
----------	---	--------------------

### ANGLED LID HORIZONTAL FREEZERS

TFM-41AL	¼	41½" x 26¾" x 31¾"
----------	---	--------------------

\* Height does not include 2½" for castors

Black vinyl exterior available at no extra charge

## Air Curtains

### FEATURES / BENEFITS

- Oversized environmentally friendly (R404A) refrigeration - holds 35° to 40°F, the ideal temperature for fresh salads, sandwiches, desserts and beverages
- Exterior - non-peel or chip white laminated vinyl, durable and permanent
- Interior - attractive, NSF approved, white aluminum with white shelves, 300 series stainless steel floor and deck pans (Also available in optional black aluminum interior with black shelves)
- Designed for convenient access, fast service and attractive display
- Safety shielded fluorescent interior lighting for longer, brighter, shadow-free illumination
- Adjustable, heavy duty, PVC coated wire shelves 10 mil thick, pure grade vinyl coating
- Foamed-in-place polyurethane high density cell insulation (CFC free)
- Leg levelers standard
- Self-contained system, no plumbing required
- TAC models are designed to operate in an environment where temperature & humidity do not exceed 75°F and 55% relative humidity
- Illuminated sign panel
- See your sales representative for the latest color & sign offerings
- Units should not be installed near HVAC vents, fans or doorways that will disrupt the air curtain and compromise the function of the cabinet. Unit should not be installed in direct sunlight
- Air curtain models will run most efficiently when completely loaded with product
- Remote units available

**True®**

### AIR CURTAIN REFRIGERATOR

MODEL	# OF SHELVES	HP	L X D X H
TAC-48*	4	1	48" x 30¼" x 80½"

### AIR CURTAIN GLASS SIDED REFRIGERATOR

TAC-48GS*	4	1	48" x 30¼" x 80½"
-----------	---	---	-------------------

\* Requires 208-230/60 Hz, single phase, NEMA 6-15R

Black vinyl exterior available at no extra charge

Stainless steel exterior available - upcharge applies

Black Vinyl Coated interior standard w/Black shelving available - upcharge applies



TAC-48



TAC-48GS



## ICE Series™ Undercounter Cubers with Built-in Storage

- Only 24" undercounter in the industry
- Only 7 year warranty in the industry (with participation in our water filter program)
- Harvest Assist for improved efficiency and consistent ice production
- Pure Ice® exclusively by Ice-O-Matic includes a built-in antimicrobial protection for the life of the machine
- Unique slide away door
- Energy Star Certified

**Ice-O-Matic**   
Ice. Pure and Simple

### AIR COOLED, HALF CUBE UNDERCOUNTER CUBERS

**ICEU150HA**  
**ICEU220HA**  
**ICEU300HA**

### ICE PRODUCTION\* PER DAY

174 lb  
238 lb  
309 lb

### STORAGE CAPACITY

73 lb  
73 lb  
130 lb

\*Ice production based on 70°F air/50°F water

## ICE Series™ Half Cube Modular Cubers

- Only top air discharge in the industry
- No side clearance required, perfect for tight fitting spaces
- 30" wide for maximum capacity in small footprint
- Harvest Assist for improved efficiency and consistent ice production
- Pure Ice® exclusively by Ice-O-Matic includes a built-in antimicrobial protection for the life of the machine
- Easy access cabinet allows access to internal components for easy cleaning and service
- Bins are sold separately



**Ice-O-Matic**   
Ice. Pure and Simple



### TOP AIR DISCHARGE, HALF CUBE MODULAR CUBERS

**ICE0250HT**  
**ICE0400HT†**  
**ICE0500HT**  
**ICE0606HT**

### ICE PRODUCTION\* PER DAY

336 lb  
505 lb  
600 lb  
652 lb

\*Ice production based on 70°F air/50°F water

†Energy Star Certified

**ICE0250HT**  
**(SHOWN WITH B40 BIN)**



**B55**



## B-Series Storage Bins

- Stainless exterior
- Built-in scoop holder eliminates the need to dig through the ice, reducing the risk of cross contamination
- Safe-hold hinge holds the bin door open while scooping ice
- Perfect fit seal for improved ice preservation
- Many sizes and storage capacities up to 1800 lb to choose from

**B40**  
**B55**

30" wide, 344 lb of storage  
30" wide, 510 lb of storage

**Ice-O-Matic**   
Ice. Pure and Simple

## Walk-In Coolers and Freezers

- Foamed-in-place urethane panels with speed-lok fastening system
- Full 36" x 78" door complete with structural frame
- Galvalume finish interior and exterior
- Freezers with 10 gauge smooth aluminum floor
- Full line of pre-assembled remote or self-contained refrigeration equipment



5'-10"	x	5'-10"	7'-9"	x	9'-8"
5'-10"	x	7'-9"	7'-9"	x	11'-7"
5'-10"	x	9'-8"	9'-8"	x	9'-8"
5'-10"	x	11'-7"	9'-8"	x	11'-7"
7'-9"	x	7'-9"			



**QUICK SHIP WALK-INS AVAILABLE IN 5 WORKING DAYS AS FOLLOWS:**

**7'-2" AND 8'-2" COOLERS LESS FLOOR PANELS**

**7'-6" AND 8'-6" FREEZERS WITH FLOOR PANELS**

**GALVALUME FINISH, PRE-ASSEMBLED REMOTE RFG.**

**INDOOR OR OUTDOOR WALK-INS**





## Kolpak Polar-Pak

### WALK-IN TO CONVENIENCE

#### UNSURPASSED QUALITY – HOST OF STANDARD FEATURES

Polar-Pak coolers and freezers are made with the same rugged, high performance construction that has made Kolpak the leader in walk-in refrigeration. The Polar-Pak modular panels of 4" 100% foamed in place non-CFC urethane foam offer superior insulating capabilities. The exterior and interior of top-quality galvalume metal offer an attractive and rugged finish. Polar-Pak also offers superior air circulation around the coils making it both economical and efficient to run.

- Top-mount refrigeration is flush to the interior
- Hot gas condensation evaporator
- Superior door construction to seal in cold, prevent condensation
- Posi-loc panel fasteners for a perfect airtight fit
- Adjustable hinges and durable handle
- Interior safety release to prevent accidental entrapment
- Coved corners on floor panels for easier cleaning, greater sanitation
- Heated air vents on freezers to eliminate vacuum and pressure build-up

#### NO OTHER MANUFACTURER OFFERS YOU GREATER FLEXIBILITY

Polar-Pak is flexible enough to be used in virtually any configuration. There is no need for numbered panels. Some standard 7'6" high units are part of our Polar-Pak program, and will ship within 7 working days after your order has been received. Orders specifying options will require standard lead times.

#### 100% USABLE STORAGE SPACE

Flush fit ceiling coil design allows full use of walk-in interior for storage.

#### QUICK AND COST-SAVING INSTALLATION

The top-mount self-contained refrigeration package significantly reduces refrigeration labor costs. Installation is quick and easy and can be completed without the services of a plumber or refrigeration technician. Plumbing is not required. The standard automatic condensate evaporator eliminates the need for a drain line on indoor units. Plug and play design.

#### DESIGN FLEXIBILITY

Available in cooler, freezer or combination cooler/freezer. You can choose from top or side-mount refrigeration. Floor or floorless application, indoor or outdoor, two ceiling heights (6'6" or 7'6") and standard panels allow for various layouts.



#### TOP-MOUNTED WALK-INS WITH REFRIGERATION SYSTEMS & FLOORS

**COOLERS:** 38°F, 115V

<b>P6-066-CT</b>	5'10" x 5'10" x 6'6"h, ½ hp
<b>P6-088-CT</b>	7'9" x 7'9" x 6'6" h, ¾ hp
<b>P7-612-CT</b>	5'10" x 11'7" x 7'6"h, ¾ hp
<b>P7-1010-CT</b>	9'8" x 9'8" x 7'6"h, 1 hp

**FREEZERS:** -10°F, 208-230V

<b>P6-066-FT</b>	5'10" x 5'10" x 6'6"h, 1 hp
<b>P6-088-FT</b>	7'9" x 7'9" x 6'6" h, 1½ hp
<b>P7-612-FT</b>	5'10" x 11'7" x 7'6"h, 1½ hp
<b>P7-1010-FT</b>	9'8" x 9'8" x 7'6"h, 2 hp

# REFRIGERATION Walk-Ins



## Kold Locker™ Walk-Ins

**10,000 MODELS AVAILABLE TO SHIP THE SAME DAY!  
COMBINATION COOLER/FREEZERS SHIP THE SAME DAY!**

- Cooler, freezer or combination cooler/freezer models
- CFC Free HFC-134a polyurethane insulation
- Exclusive Capsule Pak refrigeration system
- Flush Coil, 100% usable interior space
- Automatic condensate vaporizer – no DRAIN LINE required on indoor units
- Spring actuated door closer • Three heights: 6'7" & 7'7" with floor, 7'4" floorless
- Capacity from 77 cu ft to 1,000 cu ft • NL 2400 adjustable hinge
- Indoor or outdoor models • Installation that is fast and easy
- NL 9800 deadbolt locking handle (standard) • 15 year panel warranty
- Sizes from 3'6" x 6' to 8' x 20'
- 5" thick panels available to meet CEC - Contact your sales rep for more information
- Three temperatures: 35°, -10°F, -20°F
- Exterior finish: corrosion resistant stucco embossed coated steel
- 26" wide self closing door • FRP threshold



**CONTACT YOUR SALES REPRESENTATIVE  
FOR FURTHER DETAILS.**



## Fast-Trak® Walk-Ins

- Unlimited lengths in 1' increments!
- Available in widths of: 6', 7', 8', 9', 10', 11' & 12'
- Four heights: 7'7" & 8'7" with floor; 7'4" & 8'4" floorless
- FRP threshold
- Remote Refrigeration Systems in stock for 5 day shipment
- Cooler, freezer or combination cooler/freezer models
- CFC Free HFC-134a polyurethane insulation
- Installation is fast and easy
- Indoor or outdoor models
- 30" or 36" self closing door

**EXTERIOR FINISH:  
CORROSION  
RESISTANT STUCCO  
EMBOSSED  
COATED STEEL**

**NL 2400  
ADJUSTABLE  
HINGES**

**15 YEAR PANEL  
WARRANTY**

**SPRING ACTUATED DOOR CLOSER**




**DIGITAL  
THERMOMETER  
AND LIGHT  
SWITCH**

**INSTALLATION  
THAT IS FAST  
AND EASY**

**DEADBOLT LOCKING  
HANDLE (STANDARD)**

**AVAILABLE IN UNLIMITED LENGTHS  
SHIP IN 5 DAYS!**

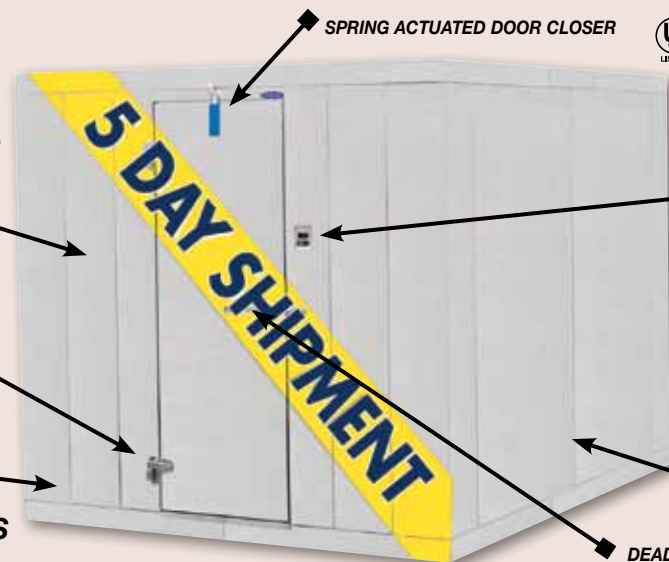

## Fineline™ Custom Walk-Ins

- Designed to your specifications
- Coolers, freezers and combination cooler/freezers
- Modular panel construction for easy installation, expansion and relocation
- 26 gauge corrosion resistant stucco embossed coated steel
- .100 smooth aluminum interior floor (on models with floor)
- Floorless models provided with NSF approved vinyl sealers
- Full 4" thick panels foamed-in-place with HFC-134a polyurethane insulation which is CFC & HCFC Free, Zero Ozone Depletion!
- Heavy duty, extruded, anodized aluminum load bearing door frame jamb
- Deadbolt locking handle
- Vapor proof light fixture
- Fifteen year panel warranty



**CONTACT YOUR SALES REPRESENTATIVE  
FOR FURTHER DETAILS.**



## Walk-In Coolers and Freezers Built To Your Exact Specifications

- For maximum use of available space and optimum functionality
- Energy efficient and environmentally sensitive
- Coolers, freezers and combos
- 4", 5" and 6" panel thicknesses for high efficiency insulation
- Multiple finish options with optional glass doors
- Manufacturing plants in California, Minnesota, Mississippi and Tennessee, backed by a national installation network
- Compliant with The Energy Independence and Security Act of 2007



## Replacement Doors For Any Manufacturer's Walk-In



- Simple retrofit of new door and framework to existing cooler and freezer walk-ins
- Reduced energy consumption for cost savings and fast payback
- Doors built with non-HCFC Envirofoam insulation
- Rigid PVC door perimeter and magnetic gasket
- Improved workplace safety and hygiene
- Available in a variety of finishes, with a full range of optional hardware, view ports, kick plates and air or strip curtains



**THERMALRITE  
COMPLIES  
WITH EISA 2007**



"USGBC" and related logo is a trademark owned by the U.S. Green Building Council and is used by permission





## Air Curtains For Commercial & Insect Control Applications

- Reduce energy costs and stop outside drafts, flying insects and airborne pollutants
- ¾ hp motors are totally enclosed for exterior use
- Include aluminum housing, grill and nozzle
- All air doors include an automatic plunger activation switch



### E-CFD SERIES – FOR COMMERCIAL OPENINGS

<b>E-CFD-36-1</b>	36"
<b>E-CFD-42-1</b>	42"
<b>E-CFD-48-1</b>	48"
<b>E-CFD-60-1 (or 2)</b>	60"
<b>E-CFD-72-2</b>	72"

### E-IBD SERIES – FOR INSECT CONTROL

<b>E-IBD-36-1</b>	36"
<b>E-IBD-42-1</b>	42"
<b>E-IBD-48-1</b>	48"
<b>E-IBD-60-1 (or 2)</b>	60"
<b>E-IBD-72-1</b>	72"

## Casert Reach-Thru Cooler Curtains

- Cut energy costs, slash compressor time and maintain temperatures in your coolers by using Casers
- Casers attach to the display case with Velcro
- They allow customers to easily reach through clear PVC strips
- Sales floors will be warmer, creating a better environment for your customers

<b>C-55</b>	48"w x 55"h
<b>C-68</b>	48"w x 68"h



**Curtron** Products  
a division of TMI LLC

## Pull-Down Night Shades

- Effectively maintains refrigeration temperature, cuts energy costs and compressor time
- Clear and translucent white night shades are 48"w and pull down to 72"
- Horizontal or vertical mount

<b>NS-CLEAR</b>	Clear PVC
<b>NS-WHITE</b>	Translucent White

## Strip and Swinging Doors

FOR 36" X 78" DOOR OPENINGS USDA & FDA APPROVED



CZN-8-PR-4080



M108-PR-4080



PP-C-080-3678

### CURTRONIZER ECONOMY STRIP DOOR

- NSF approved for walk-in coolers and freezers
- USDA Polar reinforced strips with polypropylene hardware
- Offers immediate energy savings
- Pays for itself in as little as two months

**CZN-8-PR-4080**

### M-SERIES WALK-IN STRIP DOOR

- The M-Series Premium Strip Door keeps temperatures steady in walk-in coolers and freezers
- Looped strips and universal mounting hardware install in just minutes and offers a three month or less payback period!

**M108-PR-4080**

### POLAR-PRO SWINGING DOOR

- Light impact, flexible PVC swinging door that is commonly used in freezer and cooler applications
- Include universal stainless steel mounting hardware with a lifetime warranty on corrosion

**PP-C-080-3678**

## Protecto Rack Covers

STANDARD SIZE 23"W x 28"D x 62"H  
(UNIVERSAL LOAD)

- Keeps food fresh and clean
- Aids in proofing and retarding
- Reduces drying and crusting of dough
- Breathable Mesh Covers allow products to cool quicker and without condensation while protecting against flying insects
- Insul-Covers keep product warm or cold; create an inexpensive "closed cabinet"
- Custom sizes and configurations are available

**SUPRO-20-TW**  
**SUPRO-14-EC**  
**SUPRO-BM (COLOR)**  
**SUPRO-IC (COLOR)**  
**SUPRO-14 (COLOR)**

Protecto, Translucent White  
Econo, Clear Only  
Breathable Mesh, 7 Colors  
Insul-Covers, Blue or Green  
14 oz Vinyl, Variety of Colors



**Curtron** Products  
a division of TMI LLC